

TES Series | Dikey Tip Elektrikli Hidrolik Tork Anahtarları


Electrical Torque Wrench

- Sürekli tekrarlanabilen torklama hassasiyeti \pm %3,5
- 5.000 Nm'ye kadar sıkma ve sökme kapasitesi
- 200 farklı tork seçeneğine sahip 5 farklı model
- Ayarlanan tork değerinde ulaştığında durma özelliği
- İki vites seçeneği ile hızlı ve yavaş torklama imkanı
- 220 veya 110 Volt 50/60 Hz elektrik motoru seçenekli
- Yoğun ve ağır torklama işlemlerine uygun teknoloji
- Her cihaza özgü seri numarası ve kalibrasyon belgesi
- Türkiye'de servis desteği ve kalibrasyon hizmeti

- *Constantly repeated accuracy \pm 3,5% with cut off system*
- *Tightening and loosening capacity up to 5.000 Nm*
- *200 different adjustable torque value available*
- *Maschine stops when selected torque value achieved*
- *2 speed gear mechanism for slow and fast operations*
- *Suitable design for heavy duty bolt tightening operations*
- *Both 220 and 110 volt operation power available*
- *Serial number and calibration certificate for each tool*
- *Efficient service support and calibration service in Turkey*



Sevkiyat İçeriği; Tork Anahtarı, Kalibrasyon Sertifikası, Standart Destek Ayağı, Tork Seçim Tablosu, Civata Torklama Tablosu, Kullanım Klavuzu, Metal Taşıma Çantası
Delivery Content; Torque Wrench, Standart Reaction Arm, Certificate Of Calibration, Torque Table, Bolt Quality Torque Table, Manual Instruction, Metal Carrying Case

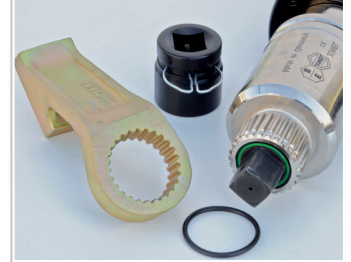

Model (Standart Seri / Standart Series)	TES-84	TES-104	TES-244	TES-354	TES-504	TES-604	TES-904
Tork Gücü / Torque power (Max)	Nm 850	1.200	2.500	3.500	5.000	6.000	10.000
Tork Gücü / Torque power (Min.)	Nm 150	280	360	360	700	800	1.024
Kare sürücü / Square drive	A inç 3/4" - 1"	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Şanzıman çapı / Out. Diam.	D mm 88	88	88	88	88	130	130
Cihaz boyu / Height	H mm 540	540	570	580	630	615	645
Net ağırlık / Weight	kg 8	8,2	9,5	10,4	12,6	15,9	18,9
Destek ayağı / Reaction arm	kg 1,6	1,6	1,6	3,5	3,5	5,7	5,7
Boşta dönüş hızı / Idle speed	d/d 16	14	10	9	3	6,5	2,5

Model (Ağır İş Serisi / Heavy Duty Series)	TES-85	TES-105	TES-245	TES-355	TES-505	TES-605	TES-905	TES-1205
Tork Gücü / Torque power (Max)	Nm 850	1.200	2.500	3.500	5.000	6.000	10.000	12.000
Tork Gücü / Torque power (Min.)	Nm 150	280	360	360	700	800	1.024	1.400
Kare sürücü / Square drive	A inç 3/4" - 1"	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Şanzıman çapı / Out. Diam.	D mm 99	99	99	99	99	135	135	172
Cihaz boyu / Height	H mm 540	540	570	580	630	615	660	660
Net ağırlık / Weight	kg 8,4	8,6	10,6	11,5	13,7	16,9	20,5	29
Destek ayağı / Reaction arm	kg 1,6	1,6	1,6	3,5	3,5	5,7	5,7	5,7
Boşta dönüş hızı / Idle speed	d/d 16	14	10	9	3	6,5	2,5	2

