




Bluetooth-Elektronik Tork Anahtarları

Bluetooth Digital Torque Wrenches



- » Torklama hassasiyeti $\pm 1\%$
- » Tork aralığı N.m [1 – 1000] 8 farklı model
- » DIN EN ISO 6789-2:2017 standardına uygun
- » Yüksek hassasiyet, izlenebilir tork ve açı kontrolü
- » Bluetooth teknolojisi ile endüstri 4.0 uyumlu
- » Bilgisayar, tablet ve telefona bağlanma özelliği
- » Programlanabilir tork ve açılı torklama özelliği
- » 180° döndürülebilir OLED ekran, şarjlı
- » Kullanıcıyı dörtlü tork erişim uyarı sistemi
- » Türkak akredite edilmiş kalibrasyon opsiyoneldir
- » Menşei Almanya, üretici Hazet CE sertifikalı
- » Servis ve kalibrasyon Surkon tarafından karşılanır
- » Torque accuracy ± 1
- » Torque ranges N.m [1 – 1000]
- » Meets the requirements of DIN EN ISO 6789-2:2017
- » High accuracy, traceable torque and angle control
- » Industry 4.0 compatible with Bluetooth technology
- » Connectable to computer, tablet, smart phone and watch
- » Ability to set a torque, angle and final torque target
- » 180° rotatable OLED display, Rechargeable
- » Four signals alert the user during screwing process
- » Supplied with a Declaration of Conformance
- » Delivered with house calibration certificate
- » Origin Germany, manufactured by Hazet, CE certified

| Parça Part | Model Model | Tork Aralığı Torque Range | Hassasiyet Accuracy | Açı Hassasiyeti Angle Accuracy | Sürücü Drive | Uç Girişi Insert Square | Cırcır Dış Ratched Teeth | Uzunluk Length | Ağırlık Weight |
|-------------|-------------|---------------------------|-------------------------|--------------------------------|--------------|-------------------------|--------------------------|----------------|----------------|
| # | # | N.m | % | % | inch | mm | # | mm | kg |
| 7280-2 sTAC | 7000 sTAC | 1-10 | $\pm 2\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 1/4" | 9x12 | 20 | 290.5 | 0.48 |
| 7281-2 sTAC | 7000 sTAC | 2.5-25 | $\pm 2\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 1/4" | 9x12 | 20 | 290.5 | 0.48 |
| 7290-2 sTAC | 7000 sTAC | 5-60 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 3/8" | 9x12 | 30 | 347 | 0.64 |
| 7291-2 sTAC | 7000 sTAC | 10-100 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 3/8" | 9x12 | 30 | 428 | 0.72 |
| 7292-2 sTAC | 7000 sTAC | 20-200 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 1/2" | 14x18 | 32 | 578.5 | 1.1 |
| 7294-2 sTAC | 7000 sTAC | 40-400 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 3/4" | 14x18 | 32 | 1021 | 2.9 |
| 7295-2 sTAC | 7000 sTAC | 65-650 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 3/4" | 14x18 | 32 | 1271 | 4.6 |
| 7250-2 sTAC | 7000 sTAC | 200-1000 | $\pm 1\% - \pm 1$ Digit | $\pm 1^\circ - \pm 1^\circ$ | 3/4" | * | 32 | 1772 | 8.4 |

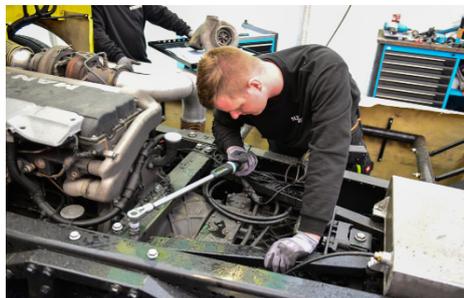

Eşik Değeri
Threshold Value

Uygun Değer
O.K Value

Uygun Olmayan Değer
Not O.K Value