



# Hydraulic Diagnostic Products

## Fixed Position and Portable Equipment



# Table of Contents

---

## Portable Hydraulic Testers

General Design Features	Page	3
Flo-Check® USB Hydraulic System Analyzer	Page	4-5
PFM6 Series Portable Hydraulic Tester	Page	6-7
PFM6BD Series Bi-directional Tester	Page	8-9
PFM8 Series Digital Tester and Dynamometer	Page	10-11
F6100 Series Sensor Arrays with Load Valve	Page	12-13
Pressure Drop Charts for Testers	Page	14

---

## Turbine Flow Sensors

General Design Features	Page	15
Activa™ Sensor Arrays	Page	16-17
Ultima Sensor Arrays	Page	18-19
Classic Turbine Flow Sensors	Page	20-21
Quad Series Turbine Flow Sensors	Page	22-23
Pressure Drop Charts for Turbine Flow Sensors	Page	24

---

## Accessories

K-Factor Scaler	Page	25
Pressure Sensor	Page	26
Temperature Sensor	Page	27
Cable Assemblies	Page	28-29

---

## Diagnostic Test Equipment

MC4000	Page	30
--------	------	----

---

## Hydraulic Formulas & Viscosity Information

Page	31
------	----

---

## Contact Us:


**Telephone:** 262-639-6770  
800-HEDLAND  
800-433-5263

**Fax:** 262-639-2267  
800-CHK-FLOW  
800-245-3569

**E-mail:** [info@flo-tech.com](mailto:info@flo-tech.com)

**Website:** [flo-tech.com](http://flo-tech.com)

**Office Hours:** Monday - Friday from 7:30 a.m. to 5 p.m. CT

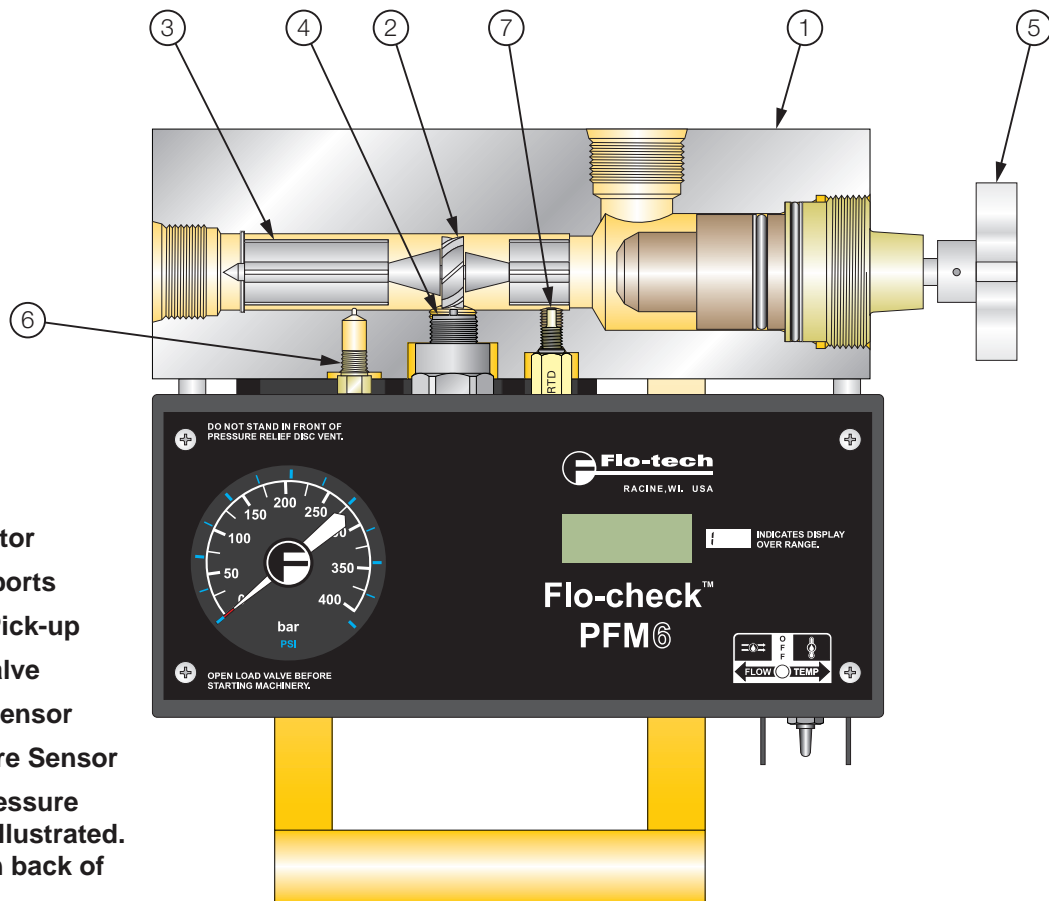

## Operating Principle

Flo-tech's portable hydraulic testers simultaneously measure the flow rate, temperature, pressure and, optionally, power of hydraulic fluid. Designed for testing pumps, valves, cylinders, motors, hydrostatic or power shift transmissions, and power steering systems in both mobile and stationary applications, these compact units utilize turbine flow meter technology.

**Flow:** As fluid passes through the tester, it turns the turbine rotor. As each turbine blade passes the magnetic pick-up, an electrical signal is generated. This frequency signal is proportional to the flow rate and is transmitted to the tester's electronics for display on a PC screen or the front panel LCD of the tester's electronic case.

**Temperature:** All testers contain an internal temperature sensor for measuring the temperature of the fluid as it passes through the flow meter body.

**Pressure:** Pressure is provided in either analog or digital format, depending on the model of the tester. PFM6 and PFM6BD testers are equipped with helical type pressure gauges, while the PFM8 tester includes a silicon strain gauge pressure sensor and the Flo-Check USB tester utilizes a piezoelectric pressure sensor.

**Power:** Power measurements are derived from the product of flow and pressure. The Flo-Check USB and the PFM8 are designed to calculate this measurement and display the results in either horsepower or kilowatts. When using the PFM6 or PFM6BD, power can be calculated using the following formulas:

$$\text{H.P.} = \frac{\text{GPM} \times \text{PSI}}{1714} \quad \text{H.P.} = \frac{\text{LPM} \times \text{Bar}}{447.4}$$

$$\text{kW} = \frac{\text{LPM} \times \text{Bar}}{600}$$

Designed for both ease of operation and safety, all testers feature loading valves with fingertip control and pressure surge protection.

# Flo-Check® USB Hydraulic System Analyzer

Simultaneously Measures Flow, Pressure and Temperature



- Flow accuracy  $\pm 1\%$  of reading @ 32 cSt
- Field selectable US or metric readings
- High and low set point alarms for flow, pressure and temperature
- Captures pressure spikes up to 10,000 PSI (0.2 milliseconds duration)
- Exports saved data to Microsoft Excel® and other spreadsheet programs
- USB powered
- Easy to use, plug and play
- Calculates hydraulic power
- Select continuous monitoring or capture data manually
- Logs up to 12 hours
- Records alarm history

The Flo-Check Hydraulic System Analyzer can be used as a stationary or portable tester for both industrial and mobile hydraulic system diagnostics, and analysis of the prognostic health of a hydraulic system. It features flow, pressure and temperature sensors that are monitored by a data acquisition module. This module records the operating parameters of the system and transfers them to the user's laptop via the USB port.

The custom software utility is a Windows®-based application which is compatible with Windows Vista®, Windows XP, Windows 2000, and Windows 7. This intuitive software configures the displayed information into user-selected engineering units and provides real-time graphics with instantaneous readings and trends for all three measurement parameters. The software also permits the data to be saved for export into a spreadsheet program.

The Hydraulic System Analyzer is powered through the USB port of a PC, making it easy to set up and ideal for portable applications. Interfaced to the PC application, the Hydraulic Analyzer offers a straightforward method of monitoring system parameters complete with data acquisition.



## SPECIFICATIONS

### Performance

#### Flow:

Accuracy	$\pm 1\%$ of reading @ 32 cSt
Repeatability	$\pm 0.2\%$

#### Pressure:

Accuracy	$< \pm 0.5\%$ BFS
Stability	$< \pm 0.25\%$ of full scale
Zero Offset	$< \pm 2\%$ of full scale
TC Zero and TC Span	$< \pm 1.5\%$ of full scale
Response Time	0.2 milliseconds

#### Temperature:

Calibration Error (25 °C)	$\pm 1$ °C
Absolute Error (over full range of sensor, 0 to 150 °C)	
Without Calibration	$\pm 3$ °C
With Calibration	$\pm 1.6$ °C
Nonlinearity	$\pm 0.4$ °C
Repeatability	$\pm 0.1$ °C

#### Data Acquisition:

Sample Rate	10 kHz
PC Screen Update/Record Rate	
Flow	1 second (average 10K samples)
Temperature	1 second (average 10K samples)
Pressure	1 second (min, max, average 10K samples)

### Power

**USB Power:** +5 VDC (supplied through USB port of a PC)

**USB Voltage Tolerance:** +4.6 VDC min, +5.25 VDC max  
**Current:** 100 mA, typ

### Environmental

**Pressure Rating:** 6000 PSI (414 Bar) maximum with a 3:1 safety factor; capable of 10,000 PSI transients

**Operating Pressure:** <6000 PSI (414 Bar, 41.4 MPa, 420 kg/cm<sup>2</sup>); capable of 10,000 PSI transients

**Internal Valve By-pass:** 7500 PSI  $\Delta P$

**Pressure Drop:** See  $\Delta P$  charts on page 14

**Fluid Temperature:** -40 to +300 °F (-40 to +150 °C)

**Ambient Temperature:** +32 to +185 °F (0 to +85 °C)

**Storage Temperature:** -40 to +185 °F (-40 to +85 °C)

**Humidity:** 0-90%, non-condensing

### Material

**Housing:** 6013-T351 Aluminum; anodized

**Turbine Rotor:** T416 Stainless steel

**Rotor Supports:** 6061-T6 Aluminum alloy

**Seals:** Viton® standard; EPR optional

**Ball Bearings:** 440C Stainless steel

**Hub Cones:** 6061-T6 Aluminum alloy

**Temperature Probe:** T303 Stainless steel

**Valve:** 12L14 Steel body with 303 SS seat

**Spool/Sleeve:** 12L14 Steel

**Magnetic Pick-up:**

Body	T303 Stainless Steel
Nut	T303 Stainless Steel

**Electronic Case:** Cold rolled steel; black zinc plate with clear seal

**Ports:** SAE Straight thread O-ring boss, female, J1926/1; ISO1179 (BSPP)



# Flo-Check® USB Hydraulic System Analyzer

Simultaneously Measures Flow, Pressure and Temperature

## SOFTWARE

The Flo-tech Analyzer software provides a real-time graphical and digital interface for monitoring and/or recording pressure, temperature and flow rate parameters from the Hydraulic Analyzer. In addition to the graphical and digital displays, the main screen also consists of a menu bar, buttons with common functions and alarm indicators.

The software offers the following options:

- View real time pressure, temperature, flow rate and power measurements
- Record all measurements to a file
- Choice of recording all measurement points or capturing points manually
- Selection of all measurement units, US or metric
- Ability to adjust display of graph data
- High/Low alarm indicators set by the operator

All measurements taken can be saved once per second to a comma separated value (.csv) file for export into a spreadsheet program. For example, recording for 2 minutes would yield 120 points of data. Even though data points are only recorded once per second, pressure spikes and dips are captured by recording the maximum or minimum pressure during each measurement period. Therefore, the precise shape of the pressure spike is not recorded but its amplitude and the time it occurred are both recorded.

Measurement (over a 1 second time period)	Color Indication	Alarm Indication	Digital Indication	Graphical Display	Record to File
Average Pressure	Green	●	●	●	●
Minimum Pressure	Dark Green	●	●	●	●
Maximum Pressure	Dark Green	●	●	●	●
Average Temperature	Blue	●	●	●	●
Average Flow Rate	Yellow	●	●	●	●
Average Power	Orange	●	●	●	●




## Graphs

The graph on the main screen contains more than 60 points of data. Previous data points are saved in memory and can be viewed at any time. Adjustments can be made to optimize data that is displayed by hiding individual graph plots, adjusting the scale of each plot or adding horizontal gridlines to the graph.

## Alarms

There are three sets of High/Low alarm indicators on the main screen which monitor pressure, temperature and flow rate. Alarm indicators flash if the current system measurements exceed the alarm limits set by the operator and continue to flash when the current system measurements return to normal to alert the operator that an alarm condition occurred. Alarms must be reset manually to acknowledge the alarm condition.

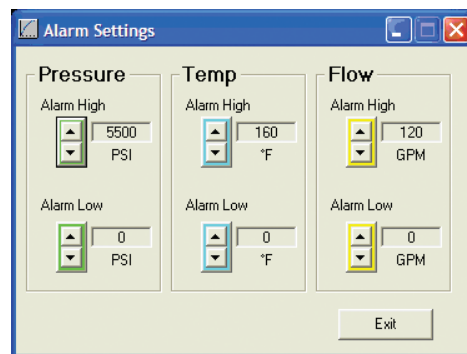

## ORDERING INFORMATION

MODEL NUMBER <sup>1</sup>	NOMINAL PORT SIZE	FLOW RANGE
F7160	SAE 16	3 - 85 GPM
F7161	SAE 24	7 - 199.9 GPM
F7162	G 1	15 - 321 LPM
F7163	G 1-1/2	26 - 757 LPM

<sup>1</sup> Each Flo-Check Hydraulic System Analyzer includes a 16.4 ft. (5 M) USB, A male to B male (IP 68) connection cable, CD-Rom of the software utility, and complete operating instructions packaged in a protective carrying case.



## ACCESSORIES

MODEL NUMBER	DESCRIPTION	MODEL NUMBER	DESCRIPTION
F001109	5-Point Calibration Certificate <sup>2</sup>	F1614-7500	Pressure Relief Disc, 7500 PSI (1 per Tester)
F001110	10-Point Calibration Certificate <sup>2</sup>		

<sup>2</sup> Certificates are traceable to NIST, ISO 9001.

# PFM6 Digital Portable Hydraulic Tester

Simultaneously Measures Flow, Pressure and Temperature



- Five flow ranges
- Large 3-1/2 digit LCD for flow and temperature
- Helical tube pressure gauge
- One toggle switch to control power and select flow and temperature
- Loading valve with fingertip control of pressure
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- Available with SAE or BSPP ports
- Pressures up to 6000 PSI (414 Bar)
- Temperatures up to 300 °F (150 °C)
- Flow accuracy  $\pm 1\%$  of full scale
- Repeatability  $\pm 0.2\%$

The PFM6 Series is a compact, lightweight portable tester designed for fast diagnostic troubleshooting of all types of mobile or stationary hydraulic systems and components. These self-contained testers feature laboratory accuracy and provide flow, pressure and temperature measurements simultaneously from one point.

Simple operation includes a toggle switch to display either flow or temperature readings and a loading valve that operates with fingertip control. The dual scale helical tube pressure gauge offers pulsation dampening and high overpressure capacity. For safe operation, all testers include an internal pressure relief system.

## SPECIFICATIONS

### Performance

<b>Flow Accuracy:</b>	$\pm 1\%$ of full scale
<b>Repeatability:</b>	$\pm 0.2\%$
<b>Turbine Response:</b>	$\leq 200\text{ms}$
<b>Temperature:</b>	
Fluid	-4 to +300 °F (-20 to +150 °C)
Ambient	-4 to +131 °F (-20 to +55 °C)
<b>Flow Readout:</b>	Linearity and zero shift $\pm 1$ digit
<b>Operating Pressure:</b>	up to 6000 PSI (414 Bar, 41.4 MPa, 420 kg/cm <sup>2</sup> )
<b>Pressure Drop:</b>	See $\Delta P$ charts on page 14
<b>Readout Accuracy:</b>	$\pm 1$ digit


### Material

<b>Housing:</b>	6013-T651 Aluminum; anodized
<b>Turbine Rotor:</b>	T416 Stainless steel
<b>Ball Bearings:</b>	440C Stainless steel
<b>Rotor Shaft:</b>	T303 Stainless steel
<b>Rotor Supports:</b>	
PFM6-15/30	CA360 Brass
PFM6-60/85/200	6061-T6 Aluminum alloy
<b>Hub Cones:</b>	6061-T6 Aluminum alloy
<b>Valve Body:</b>	
PFM6-15/30	Cold rolled steel; zinc plate, dichromate finish
PFM6-60/85/200	12L14 Steel; zinc plate, dichromate finish
<b>Valve Stem:</b>	T303 Stainless steel
<b>Poppet:</b>	12L14 Steel; hardened
<b>Sleeve:</b>	
PFM6-200 only	D.O.M. steel tube
<b>Temperature Probe:</b>	T303 Stainless steel
<b>Magnetic Pick-up:</b>	
Body	T303 Stainless Steel
Nut	T303 Stainless Steel
<b>Seals:</b>	Buna N standard; Viton® and EPR optional
<b>Carrying Handle:</b>	Cast aluminum; anodized
<b>Electronic Case &amp; Cover:</b>	Cold rolled steel; zinc plate with clear seal, epoxy black paint
<b>Battery:</b>	4 AA size alkaline, ~ 50 hours of service
<b>Ports:</b>	SAE Straight thread O-ring boss, female J1926/1; ISO1179 (BSPP)

# PFM6 Digital Portable Hydraulic Tester

Simultaneously Measures Flow, Pressure and Temperature

## DIMENSIONS

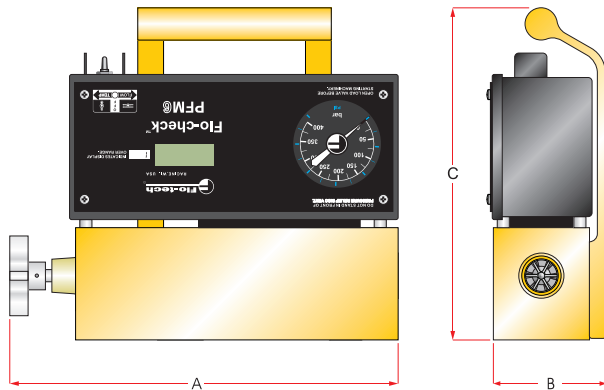

SERIES	A LENGTH IN (mm)	B DEPTH IN (mm)	C HEIGHT IN (mm)	WEIGHT LBS (KG)
PFM6-15	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
PFM6-30	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
PFM6-60	11.5 (292)	3.5 (89)	9.8 (249)	16.50 (7.5)
PFM6-85	11.5 (292)	3.5 (89)	9.8 (249)	16.50 (7.5)
PFM6-200	12.3 (311)	4.0 (101)	10.3 (262)	20.00 (9.1)

## ORDERING INFORMATION

SERIES	NOMINAL PORT SIZE	FLOW RANGE	MODEL NUMBER	STD or CE MODEL	PRESSURE GAUGE UNITS OF MEASURE
PFM6-15	SAE 12	1 - 15 GPM	F5080 * - XXX	Leave blank for standard model or CE for CE option	PSI BAR MPA KG/CM2
PFM6-30	SAE 12	2 - 30 GPM	F5079 * - XXX		
PFM6-60	SAE 16	3 - 60 GPM	F5078 * - XXX		
PFM6-85	SAE 16	4 - 85 GPM	F5077 * - XXX		
PFM6-200	SAE 24	7 - 199.9 GPM	F5076 * - XXX		
PFM6-15	G 3/4	4 - 56 LPM	F5110 * - XXX		
PFM6-30	G 3/4	7.5 - 113.6 LPM	F5111 * - XXX		
PFM6-60	G 1	12 - 227 LPM	F5112 * - XXX		
PFM6-85	G 1	15 - 321 LPM	F5113 * - XXX		
PFM6-200	G 1-1/2	26 - 757 LPM	F5114 * - XXX		

Examples:

**F5076-PSI** = PFM6-200  
SAE 24 ports  
7 - 199.9 GPM flow range  
Standard model  
PSI pressure units

**F5111CE-BAR** = PFM6-30  
G 3/4 ports  
7.5 - 113.6 LPM flow range  
CE certified  
Bar pressure units

## ACCESSORIES

MODEL NUMBER	DESCRIPTION	SERIES
F4934-1530	Carrying Case	PFM6-15 & PFM6-30
F4934-6085	Carrying Case	PFM6-60 & PFM6-85
F4934-200	Carrying Case	PFM6-200
F1614-7500	Pressure Relief Disc, 7500 PSI (1 per Tester)	All PFM6s
F001109	5-Point Calibration Certificate <sup>1</sup>	All PFM6s
F001110	10-Point Calibration Certificate <sup>1</sup>	All PFM6s

<sup>1</sup> Certificates are traceable to NIST, ISO 9001.

# PFM6BD Bi-Directional Hydraulic Tester

Simultaneously Measures Flow, Pressure and Temperature

---



- Bi-directional in-line testing capabilities in three flow ranges
- Large 3-1/2 digit LCD for flow and temperature
- Helical tube pressure gauge
- One toggle switch to control power and select flow and temperature
- Loading valve with fingertip control of pressure
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- SAE ports
- Pressures up to 6000 PSI (414 Bar)
- Temperatures up to 300 °F (150 °C)
- Flow accuracy  $\pm 1\%$  of full scale
- Repeatability  $\pm 0.2\%$

The PFM6BD Series includes all the features of the standard PFM6 Series with the added benefit of bi-directional flow measurement. Designed for fast diagnostic troubleshooting of all types of mobile or stationary hydraulic systems and components, these compact testers offer laboratory accuracy and provide flow, pressure and temperature measurements simultaneously from one point.

## SPECIFICATIONS

### Performance

#### Flow Accuracy:

Forward  $\pm 1\%$  of full scale

Reverse  $\pm 2\%$  of full scale

**Repeatability:**  $\pm 0.2\%$

**Turbine Response:**  $\leq 200\text{ms}$

#### Temperature:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

**Flow Readout:** Linearity and zero shift  
 $\pm 1$  digit

**Operating Pressure:** up to 6000 PSI (414 Bar,  
41.4 MPa, 420 kg/cm<sup>2</sup>)

**Pressure Drop:** See  $\Delta P$  charts on page 14

**Readout Accuracy:**  $\pm 1$  digit

---

### Material

**Housing:** 6013-T651 Aluminum; anodized

**Turbine Rotor:** T416 Stainless steel

**Ball Bearings:** 440C Stainless steel

**Rotor Shaft:** T303 Stainless steel

**Rotor Supports:** 6061-T6 Aluminum alloy

**Hub Cones:** 6061-T6 Aluminum alloy

**Valve Body:** 12L14 Steel; zinc plate,  
dichromate finish

**Valve Stem:** T303 Stainless steel

**Spool/Sleeve:** 4340 Alloy steel; hardened

**Temperature Probe:** T303 Stainless steel

#### Magnetic Pick-up:

Body T303 Stainless Steel

Nut T303 Stainless Steel

**Seals:** Buna N standard;  
Viton® and EPR optional  
Cast aluminum; anodized

#### Carrying Handle:

#### Electronic Case

#### & Cover:

Cold rolled steel; zinc plate with  
clear seal, epoxy black paint

#### Battery:

4 AA size alkaline,  
~ 50 hours of service

---

#### Ports:

SAE Straight thread O-ring  
boss, female J1926/1


---



# PFM6BD Bi-Directional Hydraulic Tester

Simultaneously Measures Flow, Pressure and Temperature

## DIMENSIONS

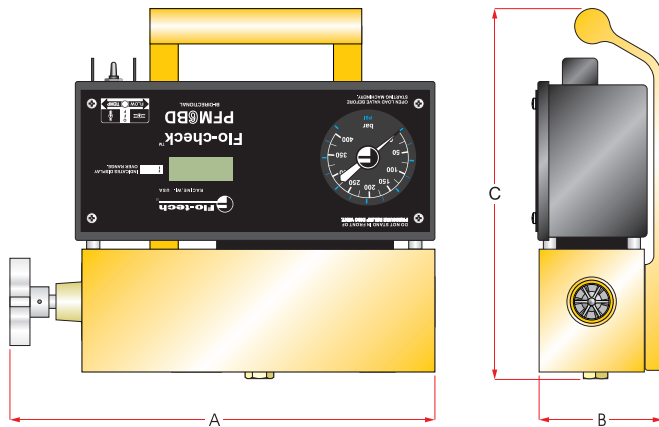

SERIES	A LENGTH IN (mm)	B DEPTH IN (mm)	C HEIGHT IN (mm)	WEIGHT LBS (KG)
PFM6BD-60	11.3 (287)	3.5 (89)	10.1 (256)	16.50 (7.5)
PFM6BD-85	11.3 (287)	3.5 (89)	10.1 (256)	16.50 (7.5)
PFM6BD-200	11.8 (300)	4.0 (101)	10.6 (268)	19.50 (9.0)

## ORDERING INFORMATION

SERIES	NOMINAL PORT SIZE	FLOW RANGE	MODEL NUMBER	STD or CE MODEL	PRESSURE GAUGE UNITS OF MEASURE
PFM6BD-60	SAE 16	3 - 60 GPM (12 - 227 LPM)	F5082 * - XXX	Leave blank for standard model or CE for CE option	PSI BAR MPA KG/CM2
PFM6BD-85	SAE 16	4 - 85 GPM (15 - 321 LPM)	F5083 * - XXX		
PFM6BD-200	SAE 24	7 - 199.9 GPM (26 - 757 LPM)	F5084 * - XXX		

Examples:

**F5083-PSI** = PFM6BD-85  
SAE 16 ports  
4 - 85 GPM (15 - 321 LPM)  
Standard model  
PSI pressure units

**F5082CE-PSI** = PFM6BD-60  
SAE 16 ports  
3 - 60 GPM (12 - 227 LPM)  
CE certified  
PSI pressure units

## ACCESSORIES

MODEL NUMBER	DESCRIPTION	SERIES
F4934-6085	Carrying Case	PFM6BD-60 & PFM6BD-85
F4934-200	Carrying Case	PFM6BD-200
F1614-7500	Pressure Relief Disc, 7500 PSI (2 per Tester)	All PFM6BDs
F001109	5-Point Calibration Certificate <sup>1</sup>	All PFM6BDs
F001110	10-Point Calibration Certificate <sup>1</sup>	All PFM6BDs

<sup>1</sup> Certificates are traceable to NIST, ISO 9001.

# PFM8 Digital Hydraulic Tester & Dynamometer

Simultaneously Measures Flow, Pressure, Power and Temperature



- Five flow ranges
- Front panel selectable US or metric readings
- Dynamometer reads power (HP & kW) directly
- 3-1/2 digit LCDs for digital display of flow, temperature, pressure and power
- Large easy-to-use membrane switch
- Loading valve with fingertip control of pressure
- Silicon strain gauge pressure sensor
- Platinum resistance temperature sensor
- Pressure surge protection with internal pressure relief
- Turbine flow sensor provides fast response
- Pressures up to 6000 PSI (414 Bar)
- Temperatures up to 300 °F (150 °C)
- Flow accuracy  $\pm 1\%$  of full scale
- Repeatability  $\pm 0.2\%$

The all digital PFM8 Series combines a compact, lightweight hydraulic tester and a dynamometer in one unit. Designed for fast diagnostic troubleshooting of all types of hydraulic systems and components, including engine-pump combinations. These testers make all flow, temperature, pressure and power measurements from one point. A bonus feature of this series is the capability to switch from US to metric units of measure in the field.

Each tester utilizes two digital displays, one for flow and temperature and a second display for pressure and power. Simple operation includes a large format membrane switch for on/off control and selection of units of measure to be displayed. A loading valve with fingertip control and an internal pressure relief system are standard features.

## SPECIFICATIONS

### Performance

<b>Flow Accuracy:</b>	$\pm 1\%$ of full scale
<b>Repeatability:</b>	$\pm 0.2\%$
<b>Turbine Response:</b>	$\leq 200\text{ms}$
<b>Temperature:</b>	
Fluid	-4 to +300 °F (-20 to +150 °C)
Ambient	-4 to +131 °F (-20 to +55 °C)
<b>Flow Readout:</b>	Linearity and zero shift $\pm 1$ digit
<b>Operating Pressure:</b>	up to 6000 PSI (414 Bar, 41.4 MPa, 420 kg/cm <sup>2</sup> )
<b>Pressure Drop:</b>	See $\Delta P$ charts on page 14
<b>Readout Accuracy:</b>	$\pm 1$ digit

### Material


<b>Housing:</b>	6013-T651 Aluminum; anodized
<b>Turbine Rotor:</b>	T416 Stainless steel
<b>Ball Bearings:</b>	440C Stainless steel
<b>Rotor Shaft:</b>	T303 Stainless steel
<b>Rotor Supports:</b>	
PFM6-15/30	CA360 Brass
PFM6-60/85/200	6061-T6 Aluminum alloy
<b>Hub Cones:</b>	6061-T6 Aluminum alloy
<b>Valve Body:</b>	
PFM6-15/30	Cold rolled steel; zinc plate, dichromate finish
PFM6-60/85/200	12L14 Steel; zinc plate, dichromate finish
<b>Valve Stem:</b>	T303 Stainless steel
<b>Poppet:</b>	12L14 Steel; hardened
<b>Sleeve:</b>	
PFM6-200 only	D.O.M. steel tube
<b>Temperature Probe:</b>	T303 Stainless steel
<b>Magnetic Pick-up:</b>	
Body	T303 Stainless Steel
Nut	T303 Stainless Steel
<b>Seals:</b>	Buna N standard; Viton® and EPR optional
<b>Carrying Handle:</b>	Cast aluminum; anodized
<b>Electronic Case &amp; Cover:</b>	Cold rolled steel; zinc plate with clear seal, epoxy black paint
<b>Battery:</b>	AA size alkaline, ~ 50 hours of service

<b>Ports:</b>	SAE Straight thread O-ring boss, female J1926/1
---------------	---

# PFM8 Digital Hydraulic Tester & Dynamometer

Simultaneously Measures Flow, Pressure, Power and Temperature

## DIMENSIONS

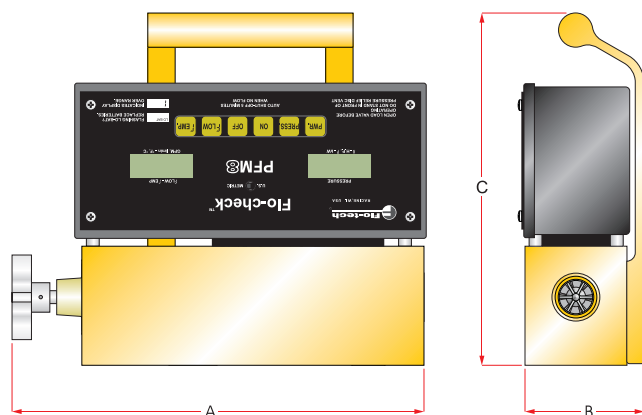

SERIES	A LENGTH IN (mm)	B DEPTH IN (mm)	C HEIGHT IN (mm)	WEIGHT LBS (KG)
PFM8-15	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
PFM8-30	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
PFM8-60	11.5 (292)	3.5 (89)	9.8 (249)	16.50 (7.5)
PFM8-85	11.5 (292)	3.5 (89)	9.8 (249)	16.50 (7.5)
PFM8-200	12.3 (311)	4.0 (101)	10.3 (262)	20.00 (9.1)

## ORDERING INFORMATION

SERIES	NOMINAL PORT SIZE	FLOW RANGE	POWER HP (kW)	MODEL NUMBER
PFM8-15	SAE 12	1 - 15 GPM (4 - 56 LPM)	52.5 (39)	<b>F5061</b>
PFM8-30	SAE 12	2 - 30 GPM (7.5 - 113.6 LPM)	105 (78)	<b>F5058</b>
PFM8-60	SAE 16	3 - 60 GPM (12 - 227 LPM)	210 (157)	<b>F5052</b>
PFM8-85	SAE 16	4 - 85 GPM (15 - 321 LPM)	298 (222)	<b>F5053</b>
PFM8-200	SAE 24	7 - 199.9 GPM (26 - 757 LPM)	700 (522)	<b>F5054</b>

Examples:

**F5061** = PFM8-15  
SAE 12 ports  
1 - 15 GPM (4 - 56 LPM)

**F5053** = PFM8-85  
SAE 16 ports  
4 - 85 GPM (15 - 321 LPM)

## ACCESSORIES

MODEL NUMBER	DESCRIPTION	SERIES
F4934-1530	Carrying Case	PFM8-15 & PFM8-30
F4934-6085	Carrying Case	PFM8-60 & PFM8-85
F4934-200	Carrying Case	PFM8-200
F1614-7500	Pressure Relief Disc, 7500 PSI (1 per Tester)	All PFM8s
F001109	5-Point Calibration Certificate <sup>1</sup>	All PFM8s
F001110	10-Point Calibration Certificate <sup>1</sup>	All PFM8s

<sup>1</sup> Certificates are traceable to NIST, ISO 9001.

# Sensor Array with Load Valve

Simultaneously Measures Flow, Pressure and Temperature



- Four flow ranges
- Analog (4-20 mA or 0-5 VDC) or pulse output for flow rate
- Silicon strain gauge pressure sensor with 4-20 mA output
- Platinum resistance temperature sensor with 4-20 mA output
- Loading valve with fingertip control of pressure
- Pressure surge protection
- Turbine flow sensor provides fast response
- Pressures up to 6000 PSI (414 Bar)
- Temperatures up to 300 °F (150 °C)
- Flow accuracy  $\pm 1\%$  of reading @ 32 cSt
- Repeatability  $\pm 0.2\%$

The Sensor Array is used for diagnostic evaluation of hydraulic motors, pumps, valves, hydrostatic drives and cylinders. When performed as part of a routine preventative maintenance program, catastrophic or untimely repairs are minimized. All that is required is to make quick and easy fluid line connections between the sensing array and appropriate locations in the hydraulic circuit. The load valve is used to create a restriction so that a relief valve setting or internal leakage of a valve or hydraulic cylinder can be determined. The efficiency of a hydraulic pump or motor can be similarly established and compared to factory specifications.

## SPECIFICATIONS

### Performance

**Flow Accuracy:**  $\pm 1\%$  of reading @ 32 cSt

**Repeatability:**  $\pm 0.2\%$

### Temperature:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

**Operating Pressure:** up to 6000 PSI (414 Bar, 41.4 MPa, 420 kg/cm<sup>2</sup>)

**Pressure Drop:** See  $\Delta P$  charts on page 14

### IFC Signal Converter, Option:

#### Power:

#### F to I

Loop powered, 6V  
insertion loss max  
10 to 30 VDC supply range

#### F to V

10 to 26 VDC

#### Inputs:

Frequency

Magnetic Pick-up

Magnetic Pick-up

0 to 3500 Hz

0 to 3500 Hz

0 to 3500 Hz

Trigger Sensitivity

30 mV p-p

30 mV p-p

Frequency Measurement

Accuracy

$\pm 1\%$

$\pm 1\%$

#### Analog Output:

Resolution

4-20 mA current loop

0-5 VDC

1:4000

1:4000

1:4000

Temperature Drift

50 ppm / °C max

50 ppm / °C max

Response

1.6 seconds min

1.6 seconds min

#### Environmental:

Ambient Temperature

-22 to +158 °F

-22 to +158 °F

(-30 to +70 °C)

(-30 to +70 °C)

Humidity

0-90%,

0-90%,

non-condensing

non-condensing

### Magnetic Pick-up, Option:

Electrical Output Signal

Self-generating alternating pulse

100 mV RMS (100 Hz) minimum

### Pressure Sensor:

(optional)

See page 26 for complete specifications

### Temperature Sensor:

(optional)

See page 27 for complete specifications

### Material

#### Housing:

6013-T651 Aluminum; anodized

#### Turbine Rotor:

T416 Stainless steel

#### Ball Bearings:

440C Stainless steel

#### Rotor Shaft:

T303 Stainless steel

#### Rotor Supports:

PFM6-15/30

CA360 Brass

PFM6-85/200

6061-T6 Aluminum alloy

#### Hub Cones:

6061-T6 Aluminum alloy

#### Valve Body:

PFM6-15/30

Cold rolled steel; zinc plate, dichromate finish

PFM6-85/200

12L14 Steel; zinc plate, dichromate finish

#### Valve Stem:

T303 Stainless steel

#### Poppet:

12L14 Steel; hardened

#### Sleeve:

PFM6-200 only

D.O.M. steel tube

#### Temperature Probe:

T303 Stainless steel

#### Magnetic Pick-up:

Body

T303 Stainless Steel

Nut

T303 Stainless Steel

#### Seals:

Buna N standard;

Viton® and EPR optional

#### Carrying Handle:

Cast aluminum; anodized

#### Ports:


SAE Straight thread O-ring boss,  
female J1926/1; ISO1179 (BSPP)



# Sensor Array with Load Valve

Simultaneously Measures Flow, Pressure and Temperature

## DIMENSIONS

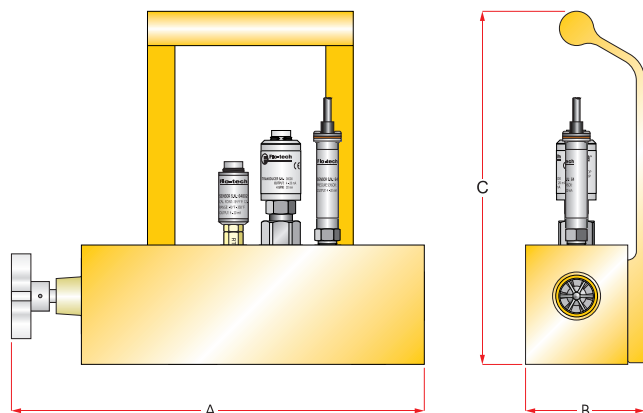

MODEL	A LENGTH IN (mm)	B DEPTH IN (mm)	C HEIGHT IN (mm)	WEIGHT LBS (KG)
F6150 / F6161	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
F6153 / F6163	11.3 (287)	3.5 (89)	9.8 (249)	13.85 (6.3)
F6156 / F6165	11.5 (292)	3.5 (89)	9.8 (249)	16.50 (7.5)
F6159 / F6167	12.3 (311)	4.0 (101)	10.3 (262)	20.00 (9.1)

## ORDERING INFORMATION

NOMINAL PORT SIZE	FLOW RANGE	MODEL NUMBER	FLOW TRANSDUCER	SEALS	TEMPERATURE	PRESSURE
SAE 12	1 - 15 GPM	F6150	<b>F</b> Frequency (Mag Pick-up) <b>I</b> 4-20 mA Out (IFC) <b>V</b> 0-5 VDC Out (IFC)	<b>B</b> Buna N <b>V</b> Viton® <b>E</b> EPR	<b>T</b> with Sensor <b>G</b> G 1/4 (F) Plugged <b>O</b> SAE 2 (J514) Plugged	<b>1</b> 1000 PSI (69 Bar) Sensor <b>3</b> 3000 PSI (207 Bar) Sensor <b>5</b> 5000 PSI (345 Bar) Sensor <b>6</b> 6000 PSI (414 Bar) Sensor <b>G</b> G 1/4 (F) Plugged <b>O</b> 1/4 NPTF (F) Plugged
SAE 12	2 - 30 GPM	F6153				
SAE 16	4 - 85 GPM	F6156				
SAE 24	7 - 199.9 GPM	F6159				
G 3/4	4 - 56 LPM	F6161				
G 3/4	7.5 - 113.6 LPM	F6163				
G 1	15 - 321 LPM	F6165				
G 1-1/2	26 - 757 LPM	F6167				

## Examples:

**F6150-IB-T6** = SAE 12 ports  
 1 - 15 GPM flow range  
 4-20 mA output  
 Buna N seals  
 Temperature sensor  
 6000 PSI (414 Bar) pressure sensor

**F6165-FV-G5** = G 1 ports  
 15 - 321 LPM flow range  
 Frequency output  
 Viton® seals  
 G 1/4 (F) plugged temp port  
 5000 PSI (345 Bar) pressure sensor

## ACCESSORIES









MODEL NUMBER	DESCRIPTION	SERIES
F1614-7500	Pressure Relief Disc, 7500 PSI (1 per Sensor)	All Sensor Arrays
F001109	5-Point Calibration Certificate <sup>1</sup>	
F001110	10-Point Calibration Certificate <sup>1</sup>	

<sup>1</sup> Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital Displays	Form No. 549
Pressure Sensors	Page 26
Temperature Sensor	Page 27
Cables	Pages 28 & 29

# Flow vs Pressure Drop Charts

Flo-Check USB, PFM Series and F6100 Sensor Arrays

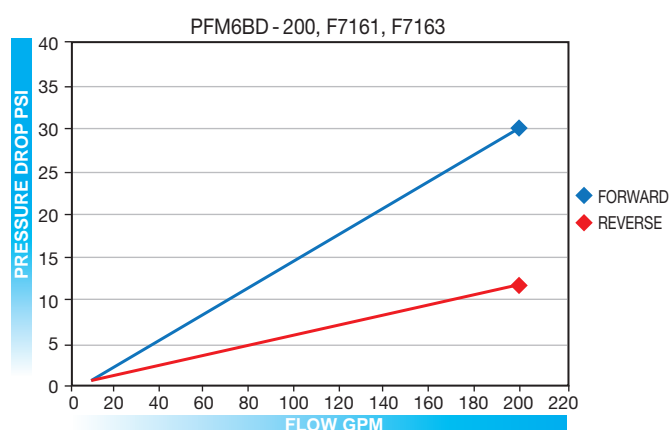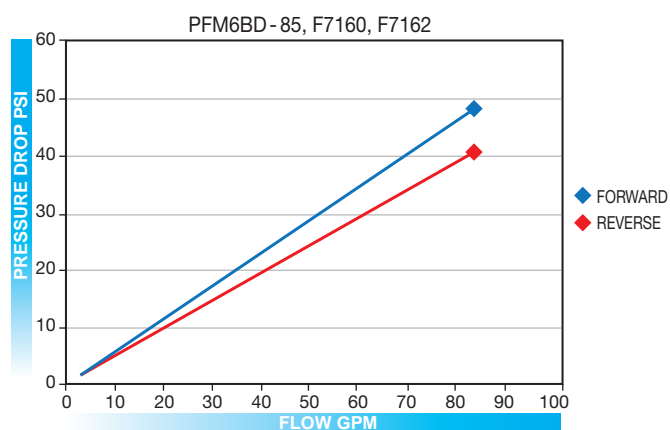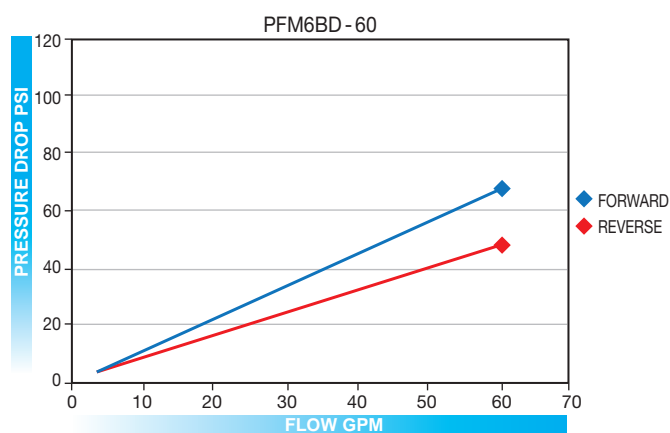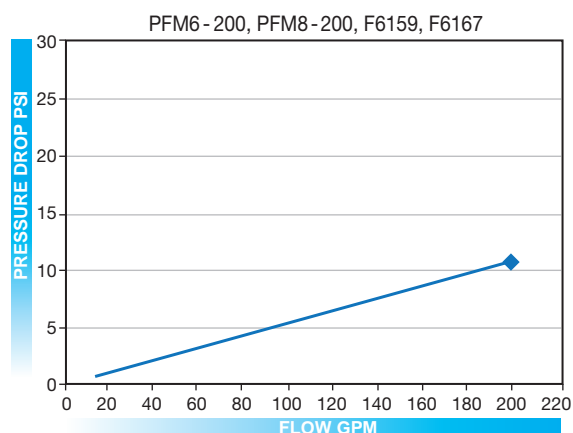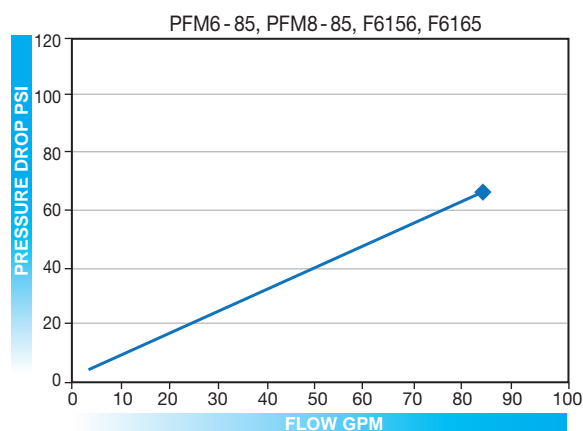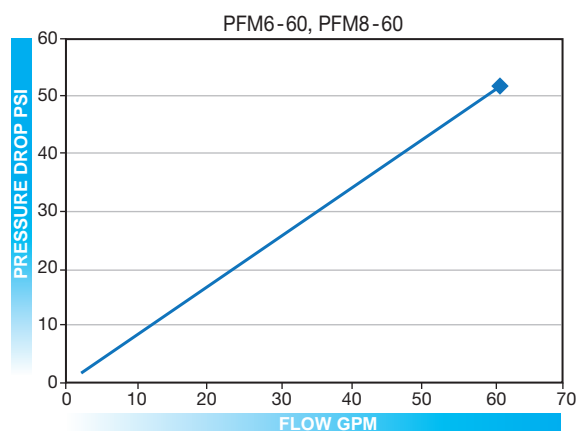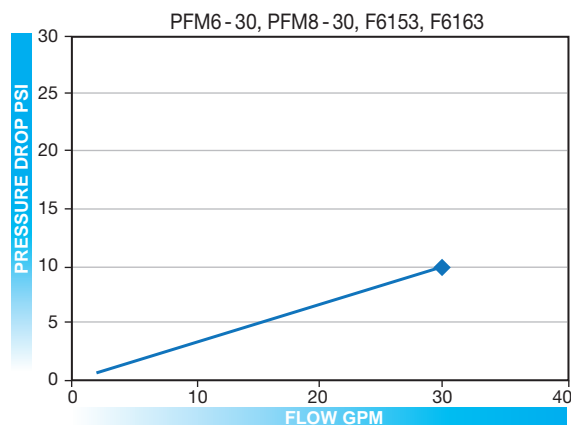
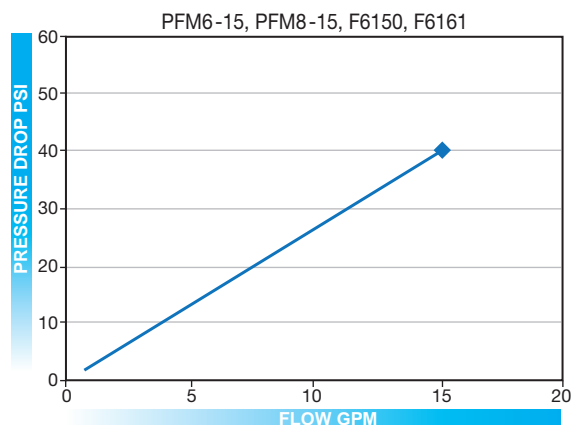


# Turbine Flow Sensors

## General Design Features

- 1 – Housing
- 2 – Turbine Rotor
- 3 – Rotor Supports
- 4 – Lock Nut
- 5 – Magnetic Pick-up (frequency output)

- 6 – Signal Converter (analog output)
- 7 – Pressure Port Adapter
- 8 – Temperature Port Adapter
- 9 – Retaining Rings

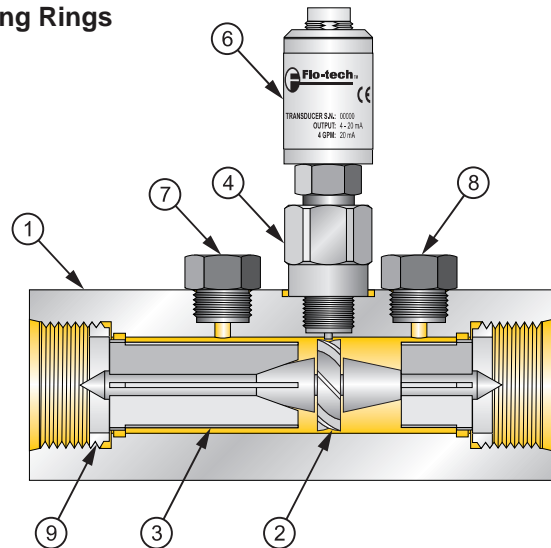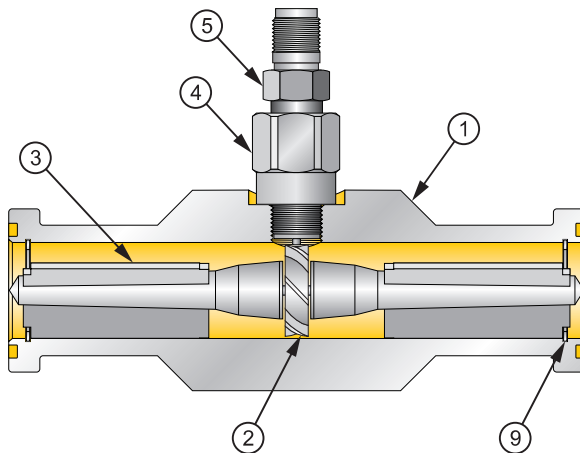

## Operating Principle

Turbine flow sensors measure the flow rate of hydraulic fluid and compatible liquids. As fluid flows through the sensor it turns the turbine rotor, and as the turbine blades pass the magnetic pick-up a frequency signal is generated. This frequency signal is proportional to the flow rate and can be transmitted to Flo-tech's digital displays or converted to an analog output. Optional sensors allow measurement of pressure and temperature.

**Rugged Construction:** Flow sensors are constructed of anodized aluminum and Stressproof® steel with SAE; BSPP; Code 61; and Code 62, 4-bolt flanged ports. The flow sensors have a fluid temperature range of -4 to +300 °F, and are available in pressure ratings up to 6000 PSI.

**Flow Straighteners:** While flow straighteners are manufactured into each sensor, it is recommended that at least 10 port diameters of upstream pipe with no obstructions to the flow sensor and at least 5 port diameters downstream pipe be provided to obtain laminar flow.

**Filtration:** All applications should be filtered to at least 40 micron. Placing the flow sensor at a higher elevation in the system will avoid collection of debris, sediment, and dirt in the sensor.

**Bi-directional flow capability:** Turbine flow sensors are inherently bi-directional, as the turbine will function normally in reverse condition. Flo-tech does not guarantee accuracy in reverse flow. However, it is generally in the range of  $\pm 1.5\%$  to  $\pm 2\%$  full scale. If required, a reverse flow calibration is optional.

**Accuracy:** The flow sensors have a forward flow accuracy of  $\pm 1\%$  full scale while monitoring hydraulic liquids with viscosity and specific gravity similar to factory calibrated fluids. Flow sensors that include the Intelligent Frequency Converter (IFC) are capable of even greater accuracy.

**Repeatability:** Flow sensor repeatability is within  $\pm 0.2\%$ . This is particularly important in cyclical applications which require consistent readings.

**Linearization:** When used with the Intelligent Frequency Converter (IFC) and/or Flo-tech digital displays, accuracy can be improved by up to 4 times through the linearization of 10 points of flow data.

**Calibration:** Flow sensors are calibrated with 0.876 specific gravity, 150 SUS (32 cSt) hydraulic oil, irrespective of final fluid use. Three points of calibration data are provided with each turbine flow sensor. Optional 5- and 10-point calibration certification is also available.

**Viscosity:** The functional range of the turbine flow sensors is approximately 25 to 500 SUS (2 to 110 cSt).

# Activa™ Sensor Array

Simultaneously Measures Flow, Pressure and Temperature



- Four flow ranges
- Turbine flow measurement
- IFC converter with 4-20 mA or 0-5 VDC output for flow rate
- 4-20 mA output for temperature and pressure
- Pressures up to 5800 PSI (400 Bar)
- Temperatures up to 300 °F (150 °C)
- Available with SAE or BSPP ports
- Flow accuracy  $\pm 1\%$  of reading @ 32 cSt
- Repeatability  $\pm 0.2\%$

The Activa Sensor Array provides flow, temperature and pressure signals in a compact unit that requires only one hydraulic line break. Each sensor transmits an output signal that is easily integrated with PCs, PLCs, recorders or panel displays. Signals can also be transmitted to Flo-tech's F6700/F6750 Series digital displays.

Typical applications include fluid characteristic measurement on test stands, stationary hydraulic system monitoring, feedback for hydraulic system control, advance warning of impending component failure and mobile hydraulic system diagnosis.

## SPECIFICATIONS

### Performance

**Forward Flow Accuracy:**  $\pm 1\%$  of reading @ 32 cSt

**Repeatability:**  $\pm 0.2\%$

### Temperature<sup>1</sup>:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

### Operating Pressure:

up to 5800 PSI (400 Bar) maximum

### Pressure Drop:

See  $\Delta P$  charts on page 24

### Readout Accuracy:

$\pm 1$  digit

### IFC Signal Converter:

#### Power:

**F to I** Loop powered, 6V

insertion loss max

10 to 30 VDC supply range

**F to V** 10 to 26 VDC

#### Inputs:

Frequency

Magnetic Pick-up

Magnetic Pick-up

Trigger Sensitivity

0 to 3500 Hz

0 to 3500 Hz

Frequency Measurement

30 mV p-p

30 mV p-p

Accuracy

$\pm 1\%$

$\pm 1\%$

#### Analog Output:

Resolution

4-20 mA current loop

0-5 VDC

Temperature Drift

1:4000

1:4000

Response

50 ppm / °C max

50 ppm / °C max

1.6 seconds min

1.6 seconds min

#### Environmental:

Ambient Temperature

-22 to +158 °F

-22 to +158 °F

(-30 to +70 °C)

(-30 to +70 °C)

Humidity

0-90%,

0-90%,

non-condensing

non-condensing

### Pressure Sensor:

(optional)

See page 26 for complete specifications

### Temperature Sensor:

(optional)

See page 27 for complete specifications

## Material

### Housing:

6013-T651 Aluminum; anodized

### Turbine Rotor:

T416 Stainless steel

### Ball Bearings:

440C Stainless steel

### Rotor Shaft:

T303 Stainless steel

### Rotor Supports:

F6202 & F6222

6061-T6 Aluminum alloy

### Hub Cones:

F6204, F6206, F6208,

CA360 Brass

F6224, F6226 & F6228 only

### Adapters:

6061-T6 Aluminum; anodized

### Retaining Rings:

6061-T6 Aluminum alloy

### Seals:

Buna N standard;

Viton® and EPR optional

### IFC (includes magnetic pick-up):

Pick-up Body

T303 Stainless Steel

Pick-up Nut

T303 Stainless Steel

IFC Case

6061-T6 Aluminum; nickel-plated

IFC Connector

Brass; nickel-plated

### Ports:

SAE J1926/1; ISO1179 (BSPP)


<sup>1</sup> When an optional pressure sensor is installed, the temperature range will be limited to the specifications for that device.



# Activa™ Sensor Array

Simultaneously Measures Flow, Pressure and Temperature

## DIMENSIONS

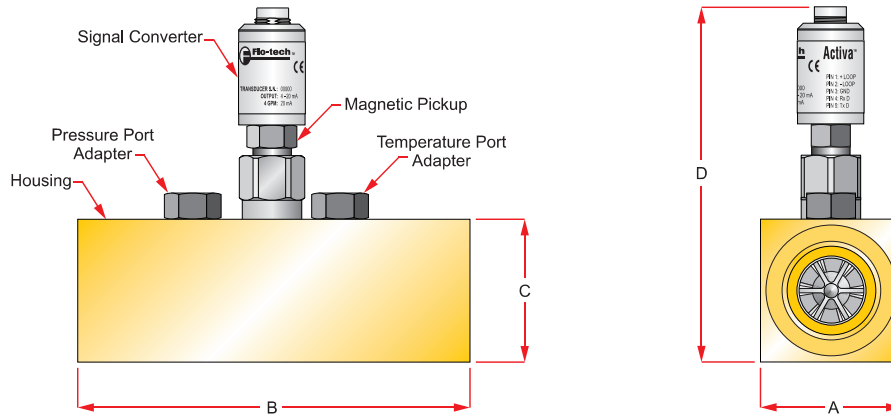

MODEL	A WIDTH IN (mm)	B LENGTH IN (mm)	C HEIGHT IN (mm)	D w/IFC IN (mm)	WEIGHT LBS (KG)
F6202-A / F6222-A	1.23 (31.2)	4.72 (120.0)	1.47 (37.3)	5.18 (131.5)	1.60 (0.73)
F6204-A / F6224-A	1.48 (37.6)	5.08 (129.0)	1.80 (45.7)	5.46 (138.7)	1.90 (0.86)
F6206-A / F6226-A	1.98 (50.3)	5.87 (149.0)	2.20 (56.0)	6.07 (154.2)	2.80 (1.27)
F6208-A / F6228-A	2.46 (62.5)	6.81 (173.0)	2.48 (63.0)	6.37 (161.8)	4.20 (1.91)

## ORDERING INFORMATION

NOMINAL PORT SIZE	FLOW RANGE	MODEL NUMBER	FLOW TRANSDUCER	SEALS	TEMPERATURE	PRESSURE
SAE 8	0.4 - 7 GPM	F6202-A	I 4-20 mA Out (IFC) V 0-5 VDC Out (IFC)	B Buna N V Viton® E EPR	T with Sensor N 1/4 NPTF (F) Plugged S SAE 2 (J514) Plugged G G 1/4 (F) Plugged D SAE 4 Plugged	1 1000 PSI (69 Bar) Sensor 3 3000 PSI (207 Bar) Sensor 5 5000 PSI (345 Bar) Sensor 6 6000 PSI (414 Bar) Sensor <sup>2</sup> N 1/4 NPTF (F) Plugged S SAE 2 (J514) Plugged F G 1/4 (F) Plugged
SAE 12	1 - 40 GPM	F6204-A				
SAE 16	4 - 80 GPM	F6206-A				
SAE 20	8 - 160 GPM	F6208-A				
G 1/4	1.5 - 26 LPM	F6222-A				
G 3/4	3.8 - 151 LPM	F6224-A				
G 1	15 - 302 LPM	F6226-A				
G 1-1/4	30 - 605 LPM	F6228-A				
						<sup>2</sup> Operating pressure rated to 5800 PSI (400 BAR) for Models F6208 and F6228.

Examples:

**F6204-AIB-T6** = SAE 12 ports  
2 - 40 GPM flow range  
4-20 mA output  
Buna N seals  
Temperature sensor  
6000 PSI (414 Bar) pressure sensor

**F6228-AVV-G5** = G 1-1/4 ports  
30 - 605 LPM flow range  
0-5 VDC output  
Viton® seals  
G 1/4 (F) plugged temp port  
5000 PSI (345 Bar) pressure sensor

## ACCESSORIES

MODEL NUMBER	DESCRIPTION
F001109	5-Point Calibration Certificate <sup>3</sup>
F001110	10-Point Calibration Certificate <sup>3</sup>

<sup>3</sup> Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital Displays	Form No. 549
Pressure Sensors	Page 26
Temperature Sensor	Page 27
Cables	Pages 28 & 29

# Ultima Sensor Array

Simultaneously Measures Flow, Pressure and Temperature



- Four flow ranges
- Turbine flow measurement
- Standard magnetic pick-up with frequency output for flow rate
- 4-20 mA output for temperature and pressure
- Pressures up to 5800 PSI (400 Bar)
- Temperatures up to 300 °F (150 °C)
- Available with SAE or BSPP ports
- Flow accuracy  $\pm 1\%$  of full scale
- Repeatability  $\pm 0.2\%$

The Ultima Sensor Array provides flow, temperature and pressure signals in a compact unit that requires only one hydraulic line break. The magnetic pick-up generates a frequency output for flow rate measurement while the pressure and temperature sensors provide 4-20 mA output signals. The flow signals can be transmitted to Flo-tech's F6600/F6650 Series, and the temperature and pressure signals can be transmitted to the F6700/F6750 Series digital displays or any other instruments that accept a frequency or 4-20 mA signal.

Typical applications include fluid characteristic measurement on test stands, stationary hydraulic system monitoring, feedback for hydraulic system control, advance warning of impending component failure and mobile hydraulics system diagnosis.

## SPECIFICATIONS

### Performance

#### Forward Flow

**Accuracy:**  $\pm 1\%$  of full scale  
( $\pm 1\%$  of rate when used with F6600/F6650 display)

**Repeatability:**  $\pm 0.2\%$

**Turbine Response:**  $\leq 200\text{ms}$

#### Temperature:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

**Operating Pressure:** up to 5800 PSI (400 Bar) max

**Pressure Drop:** See  $\Delta P$  charts on page 24

**Readout Accuracy:**  $\pm 1$  digit

### Magnetic Pick-up:

Electrical Output

Signal Self-generating alternating pulse  
100 mV RMS (100 Hz) minimum

F6202 & F6222 10 mV RMS (200 Hz) minimum

**Pressure Sensor:** See page 26 for  
(optional) complete specifications

**Temperature Sensor:** See page 27 for  
(optional) complete specifications

### Material

**Housing:** 6013-T651 Aluminum; anodized

**Turbine Rotor:** T416 Stainless steel

**Ball Bearings:** 440C Stainless steel

**Rotor Shaft:** T303 Stainless steel

**Rotor Supports:** 6061-T6 Aluminum alloy

F6202 & F6222 CA360 Brass

**Hub Cones:** 6061-T6 Aluminum alloy

F6204, F6206, F6208,  
F6224, F6226 & F6228 only

**Adapters:** 6061-T6 Aluminum; anodized

**Retaining Rings:** 6061-T6 Aluminum alloy

**Seals:** Buna N standard;  
Viton® and EPR optional

### Magnetic Pick-up:

Body T303 Stainless Steel


Nut T303 Stainless Steel

**Ports:** SAE J1926/1; ISO1179 (BSPP)

# Ultima Sensor Array

Simultaneously Measures Flow, Pressure and Temperature

## DIMENSIONS

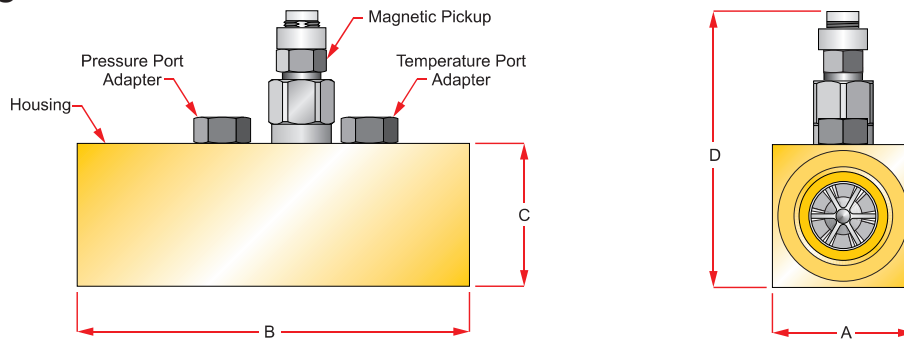

MODEL	A WIDTH IN (mm)	B LENGTH IN (mm)	C HEIGHT IN (mm)	D w/MAG IN (mm)	WEIGHT LBS (KG)
F6202-F / F6222-F	1.23 (31.2)	4.72 (120.0)	1.47 (37.3)	3.72 (94.5)	1.55 (0.70)
F6204-F / F6224-F	1.48 (37.6)	5.08 (129.0)	1.80 (45.7)	4.05 (102.9)	1.75 (0.79)
F6206-F / F6226-F	1.98 (50.3)	5.87 (149.0)	2.20 (56.0)	4.46 (113.3)	2.75 (1.25)
F6208-F / F6228-F	2.46 (62.5)	6.81 (173.0)	2.48 (63.0)	4.75 (120.7)	4.10 (1.86)

## ORDERING INFORMATION

NOMINAL PORT SIZE	FLOW RANGE	MODEL NUMBER	SEALS	TEMPERATURE	PRESSURE
SAE 8	0.4 - 7 GPM	F6202-F <sup>1</sup>	<b>B</b> Buna N <b>V</b> Viton® <b>E</b> EPR	<b>T</b> with Sensor <b>N</b> 1/4 NPTF (F) Plugged <b>S</b> SAE 2 (J514) Plugged <b>G</b> G 1/4 (F) Plugged <b>D</b> SAE 4 Plugged	<b>1</b> 1000 PSI (69 Bar) Sensor <b>3</b> 3000 PSI (207 Bar) Sensor <b>5</b> 5000 PSI (345 Bar) Sensor <b>6</b> 6000 PSI (414 Bar) Sensor <sup>2</sup> <b>N</b> 1/4 NPTF (F) Plugged <b>S</b> SAE 2 (J514) Plugged <b>F</b> G 1/4 (F) Plugged
SAE 12	1 - 40 GPM	F6204-F			
SAE 16	4 - 80 GPM	F6206-F			
SAE 20	8 - 160 GPM	F6208-F			
G 1/4	1.5 - 26 LPM	F6222-F <sup>1</sup>			
G 3/4	3.8 - 151 LPM	F6224-F			
G 1	15 - 302 LPM	F6226-F			
G 1-1/4	30 - 605 LPM	F6228-F			
<sup>2</sup> Operating pressure rated to 5800 PSI (400 BAR) for Models F6208 and F6228.					

<sup>1</sup> F6202-F and F6222-F require K-Factor Scaler, F5140 (see page 25), to amplify frequency signal to be compatible with Flo-tech's F6600/F6650 Digital Displays.

Examples:

**F6204-FB-T6** = SAE 12 ports  
2 - 40 GPM flow range  
4-20 mA output  
Buna N seals  
Temperature sensor  
6000 PSI (414 Bar) pressure sensor

**F6228-FV-G5** = G 1-1/4 ports  
30 - 605 LPM flow range  
0-5 VDC output  
Viton® seals  
G 1/4 (F) plugged temp port  
5000 PSI (345 Bar) pressure sensor

## ACCESSORIES

MODEL NUMBER	DESCRIPTION
F001109	5-Point Calibration Certificate <sup>3</sup>
F001110	10-Point Calibration Certificate <sup>3</sup>

<sup>3</sup> Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital Displays	Form No. 549
Pressure Sensors	Page 26
Temperature Sensor	Page 27
Cables	Pages 28 & 29

# Classic Turbine Flow Sensor

Measures Flow Rate Providing Frequency or Analog Output



- Choice of high strength aluminum or Stressproof® steel bodies
- Turbine flow measurement
- Flow accuracy  $\pm 1\%$  of full scale
- Repeatability  $\pm 0.2\%$
- Pressures up to 6000 PSI (414 Bar)
- Temperatures up to 300 °F (150 °C)
- Optional IFC converter provides analog output

Flo-tech's Classic Turbine Flow Sensors measure the flow rate of hydraulic fluids and other compatible liquids. Offered in a choice of high strength anodized aluminum or Stressproof® steel bodies, these durable flow sensors are capable of withstanding pressures up to 6000 PSI (414 Bar).

The Classic Series with the standard magnetic pick-up provides a frequency signal that is proportional to flow rate and can be transmitted to Flo-tech's F6600/F6650 Series digital displays. If an analog output is preferred, these sensors are also available with the IFC (Intelligent Frequency Converter) which offers either a 4-20 mA or 0-5 VDC output signal, allowing easy integration with Flo-tech's F6700/F6750 Series digital displays, PCs, PLCs or other data acquisition devices.

## SPECIFICATIONS

### Performance

#### Forward Flow Accuracy:

Magnetic pick-up  $\pm 1\%$  of full scale ( $\pm 1\%$  of rate when used with F6600/F6650 display)

IFC option  $\pm 1\%$  of reading @ 32 cSt

#### Repeatability:

$\pm 0.2\%$

#### Turbine Response:

$\leq 200\text{ms}$

#### Temperature:

Fluid -4 to +300 °F (-20 to +150 °C)

Ambient -4 to +131 °F (-20 to +55 °C)

#### Operating Pressure:

FSC, FSB Series 5000 PSI (345 Bar) maximum

FSD Series 6000 PSI (414 Bar) maximum

#### Pressure Drop:

See  $\Delta P$  charts on page 24

#### Magnetic Pick-up, Standard:

Electrical Output Signal Self-generating alternating pulse  
100 mV RMS (100 Hz) minimum

FSC-375 Series 10 mV RMS (200 Hz) minimum

#### IFC Signal Converter, Optional:

	F to I	F to V
<b>Power:</b>	Loop powered, 6V insertion loss max 10 to 30 VDC supply range	10 to 26 VDC
<b>Inputs:</b>	Magnetic Pick-up 0 to 3500 Hz 30 mV p-p	Magnetic Pick-up 0 to 3500 Hz 30 mV p-p
<b>Analog Output:</b>	4-20 mA current loop Resolution 1:4000 Temperature Drift 50 ppm / °C max Response 1.6 seconds min	0-5 VDC Resolution 1:4000 Temperature Drift 50 ppm / °C max Response 1.6 seconds min
<b>Environmental:</b>	Ambient Temperature -22 to +158 °F (-30 to +70 °C) Humidity 0-90%, non-condensing	Ambient Temperature -22 to +158 °F (-30 to +70 °C) Humidity 0-90%, non-condensing

### Material

#### Housing:

FSD Series 6013-T651 Aluminum; anodized Stressproof® steel; zinc plate, dichromate finish

#### Turbine Rotor:

#### Bearings:

FSD Series T416 Stainless steel

440C Stainless steel ball bearings

Tungsten carbide journal bearings

#### Rotor Shaft:

T303 Stainless steel

#### Rotor Supports:

6061-T6 Aluminum alloy

CA360 Brass

T303 Stainless steel

#### Hub Cones:

6061-T6 Aluminum alloy

FSC-500, 750, 1000, 1005 & FSB-1250, 1500 only

#### Retaining Rings:

Steel; zinc plate

T303 Stainless steel

#### Seals:

Buna N standard;

Viton® and EPR optional

#### Magnetic Pick-up, Standard:

Body T303 Stainless Steel

Nut T303 Stainless Steel

**IFC (includes magnetic pick-up), Optional:**

Case 6061-T6 Aluminum; nickel plate

Connector Brass; nickel plate

### Ports

SAE J1926/1,  
Code 61 and Code 62: SAE J518




# Classic Turbine Flow Sensor


## Measures Flow Rate Providing Frequency or Analog Output

### DIMENSIONS

#### FSC

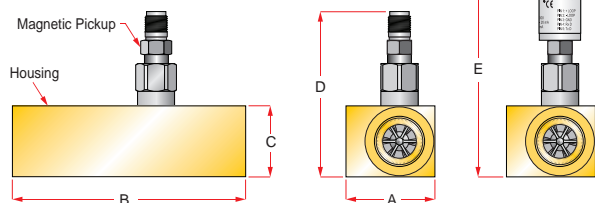


#### FSB

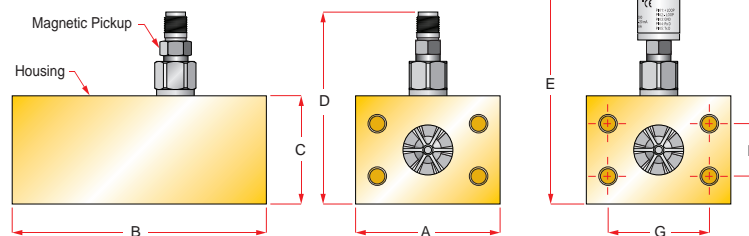

SERIES	A WIDTH IN (mm)	B LENGTH IN (mm)	C HEIGHT IN (mm)	D w/MAG IN (mm)	E w/IFC IN (mm)	F IN (mm)	G IN (mm)	WEIGHT <sup>1</sup> LBS (KG)
FSC-375	1.25 (32)	5.00 (127)	1.50 (38)	3.91 (99)	5.48 (139)	—	—	1.25 (0.57)
FSC-500	2.00 (51)	6.50 (165)	2.00 (51)	4.16 (106)	5.84 (148)	—	—	2.75 (1.25)
FSC-750	2.00 (51)	6.50 (165)	2.00 (51)	4.25 (108)	5.93 (151)	—	—	2.87 (1.30)
FSC-1000	2.50 (64)	6.50 (165)	2.00 (51)	4.34 (110)	5.97(152)	—	—	3.25 (1.47)
FSC-1005	2.50 (64)	6.50 (165)	2.00 (51)	4.34 (110)	5.97(152)	—	—	3.25 (1.47)
FSB-1250	4.00 (102)	7.00 (178)	3.00 (76)	4.94 (126)	6.43 (165)	1.188 (30.1)	2.312 (58.7)	7.75 (3.52)
FSB-1500	4.00 (102)	7.00 (178)	3.00 (76)	5.10 (130)	6.59 (167)	1.406 (35.7)	2.75 (69.9)	7.40 (3.36)
FSD-1250	2.12 (54)	7.50 (190)	2.125 (54)	4.50 (114)	5.17 (131)	—	—	6.12 (2.78)
FSD-1500	2.50 (64)	7.50 (190)	2.500 (64)	4.85 (123)	5.34 (135)	—	—	6.75 (3.06)
FSD-2000	3.12 (79)	8.25 (209)	3.125 (79)	5.39 (137)	5.45 (138)	—	—	8.55 (3.88)

<sup>1</sup> Weight is for sensors with standard magnetic pick-up installed. For sensors with IFC add .10 lbs.

#### FSD

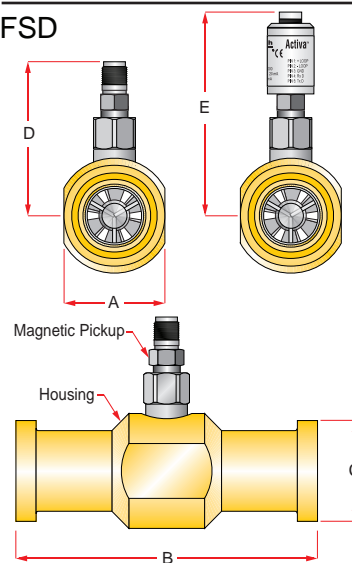

### ORDERING INFORMATION

NOMINAL PORT SIZE	FLOW RANGE GPM (LPM)	SERIES	MODEL NUMBER Frequency Output	MODEL NUMBER 4-20 mA Output	MODEL NUMBER 0-5 VDC Output
SAE 8	0.4 - 7 (1.5 - 26)	FSC-375	F2945-ASCM <sup>2</sup>	F2945-ASCI	F2945-ASCV
SAE 12	1 - 15 (4 - 56)	FSC-500	F2082-ASCM	F2082-ASCI	F2082-ASCV
SAE 12	2 - 25 (7.5 - 94)	FSC-750	F2083-ASCM	F2083-ASCI	F2083-ASCV
SAE 16	3 - 60 (11.5 - 227)	FSC-1000	F2084-ASCM	F2084-ASCI	F2084-ASCV
SAE16	4 - 85 (15 - 321)	FSC-1005	F2084-ASCM8	F2084-ASCI8	F2084-ASCV8
SAE 20, Code 61, 4-Bolt Face	5 - 100 (20 - 378)	FSB-1250	F2085-ASBM	F2085-ASBI	F2085-ASBV
SAE 24, Code 61, 4-Bolt Face	7 - 200 (27 - 757)	FSB-1500	F2086-ASBM	F2086-ASBI	F2086-ASBV
SAE 20, Code 62, Flange Head	5 - 100 (20 - 378)	FSD-1250	F2085-SCDM	F2085-SCDI	F2085-SCDV
SAE 24, Code 62, Flange Head	7 - 200 (27 - 757)	FSD-1500	F2086-SCDM	F2086-SCDI	F2086-SCDV
SAE 32, Code 62, Flange Head	10 - 350 (37 - 1324)	FSD-2000	F2998-SCDM	F2998-SCDI	F2998-SCDV

<sup>2</sup> FSC-375 (F2945-ASCM) requires K-Factor Scaler, F5140 (see page 25), to amplify frequency signal to be compatible with Flo-tech's F6600/F6650 Digital Displays.

#### Examples:

**F2084-ASCM** = SAE 16 ports  
3 - 60 GPM (11.5 - 227 LPM)  
Frequency output  
Buna N seals

**F2086-ASBI** = SAE 24, Code 61, 4-Bolt Face ports  
7 - 200 GPM (27 - 757 LPM)  
4-20 mA output  
Buna N seals

### ACCESSORIES

MODEL NUMBER	DESCRIPTION
F001109	5-Point Calibration Certificate <sup>3</sup>
F001110	10-Point Calibration Certificate <sup>3</sup>

<sup>3</sup> Certificates are traceable to NIST, ISO 9001.

For information about	Refer to
Digital Displays	Form No. 549
Pressure Sensors	Page 26
Temperature Sensor	Page 27
Cables	Pages 28 & 29

# Quad Series Turbine Flow Sensor

Provides Bi-directional Flow Rate Measurement



- Four flow ranges
- Bi-directional turbine flow measurement
- High strength aluminum bodies
- Flow accuracy  $\pm 1\%$  of full scale for both forward and reverse flow
- Repeatability  $\pm 0.2\%$
- Pressures up to 5000 PSI (345 Bar)
- Temperatures up to 300 °F (150 °C)

Derived from the FSC Series, the F2000 Quad Series of flow sensors utilizes two flow transducers which are 90-degrees electrically out of phase from each other. With the addition of a second flow transducer, it is possible to monitor flow in both directions. The F2000 Quad is suitable for up-down counters that can discern the leading and trailing edges of the quadrature signals.

Current applications include using the F2000 as a speed-sensing device on mobile equipment. This bi-directional flow sensor can be used as a governor, sending frequency signals back to a PLC which enable it to make the necessary adjustments. Other functions of the flow sensor are in linear applications where accurate positioning is required.

## SPECIFICATIONS

### Performance

#### Forward and Reverse Flow

<b>Accuracy:</b>	$\pm 1\%$ of full scale
<b>Repeatability:</b>	$\pm 0.2\%$
<b>Turbine Response:</b>	$\leq 200\text{ms}$
<b>Temperature:</b>	
Fluid	-4 to +300 °F (-20 to +150 °C)
Ambient	-4 to +131 °F (-20 to +55 °C)
<b>Operating Pressure:</b>	5000 PSI (345 Bar) maximum
<b>Pressure Drop:</b>	See $\Delta P$ charts on page 24
<b>Magnetic Pick-up:</b>	
Electrical Output	
Signal	Self-generating alternating pulse 100 mV RMS (100 Hz) minimum

### Material

<b>Housing:</b>	6013-T651 Aluminum; anodized
<b>Turbine Rotor:</b>	T416 Stainless steel
<b>Ball Bearings:</b>	440C Stainless steel
<b>Rotor Shaft:</b>	T303 Stainless steel
<b>Rotor Supports:</b>	6061-T6 Aluminum alloy
	FSC-2005, 2075 CA360 Brass
<b>Hub Cones:</b>	6061-T6 Aluminum alloy
<b>Retaining Rings:</b>	Steel; zinc plate
<b>Seals:</b>	Buna N standard; Viton® and EPR optional

### Magnetic Pick-ups:


Body	T303 Stainless Steel
Nut	T303 Stainless Steel

<b>Ports:</b>	SAE J1926/1
---------------	-------------

# Quad Series Turbine Flow Sensor

Provides Bi-directional Flow Rate Measurement

## DIMENSIONS

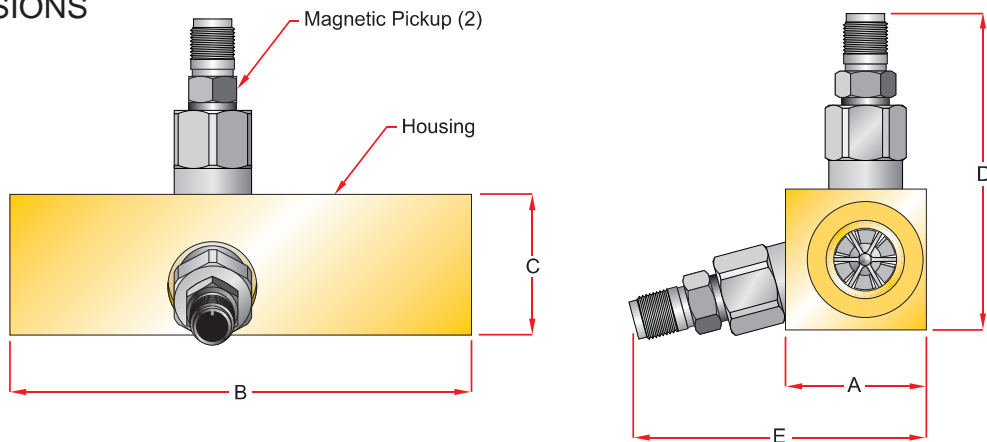

SERIES	A WIDTH IN (mm)	B LENGTH IN (mm)	C HEIGHT IN (mm)	D w/MAG IN (mm)	E w/MAG IN (mm)	WEIGHT LBS (KG)
FSC-2005	2.00 (51)	6.50 (165)	2.00 (51)	4.16 (106)	4.05 (102)	2.75 (1.25)
FSC-2075	2.00 (51)	6.50 (165)	2.00 (51)	4.25 (108)	4.05 (102)	2.87 (1.30)
FSC-2100	2.50 (64)	6.50 (165)	2.00 (51)	4.34 (110)	4.59 (117)	3.25 (1.47)
FSC-2150	2.50 (64)	6.50 (165)	2.00 (51)	4.34 (110)	4.59 (117)	7.75 (3.52)

## ORDERING INFORMATION

NOMINAL PORT SIZE	FLOW RANGE GPM (LPM)	SERIES	MODEL
SAE 12	1 - 15 (4 - 56)	FSC-2005	F2082-ASCQ4
SAE 12	2 - 25 (7.5 - 94)	FSC-2075	F2083-ASCQ4
SAE 16	3 - 60 (11.5 - 227)	FSC-2100	F2084-ASCQ4
SAE 16	4 - 85 (15 - 321)	FSC-2150	F2085-ASCQ4

Examples:

**F2084-ASCQ4** = SAE 16 ports  
3 - 60 GPM (11.5 - 227 LPM)  
Bi-directional frequency output  
Buna N seals

## ACCESSORIES

MODEL NUMBER	DESCRIPTION
F001109	5-Point Calibration Certificate <sup>1</sup>
F001110	10-Point Calibration Certificate <sup>1</sup>



For information about	Refer to
Digital Displays	Form No. 549
Cables	Pages 28 & 29

<sup>1</sup> Certificates are traceable to NIST, ISO 9001.



# Flow vs Pressure Drop Charts

## Turbine Flow Sensors



### Activa™ and Ultima Sensor Arrays

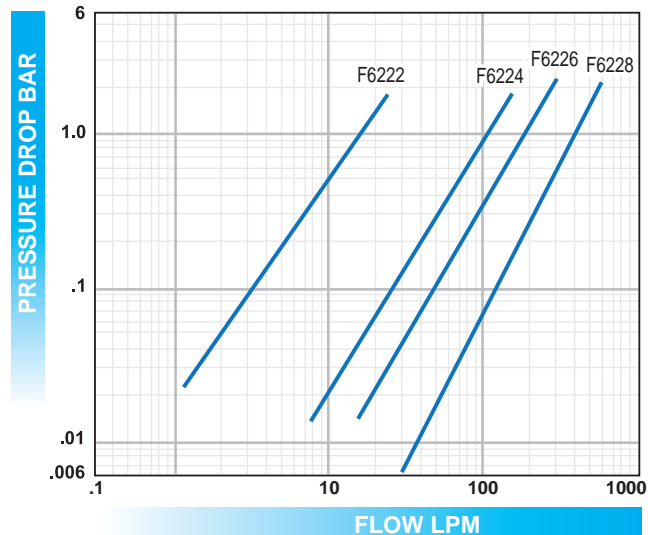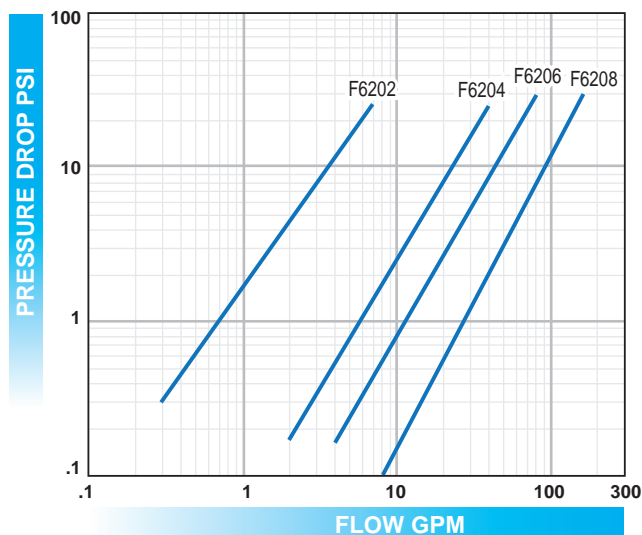

### Classic Flow Sensors

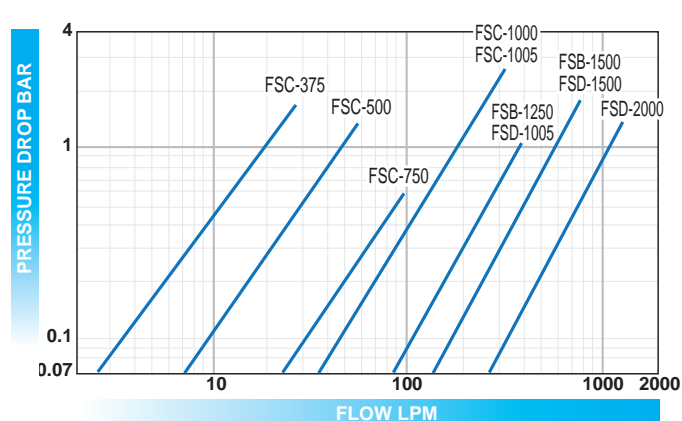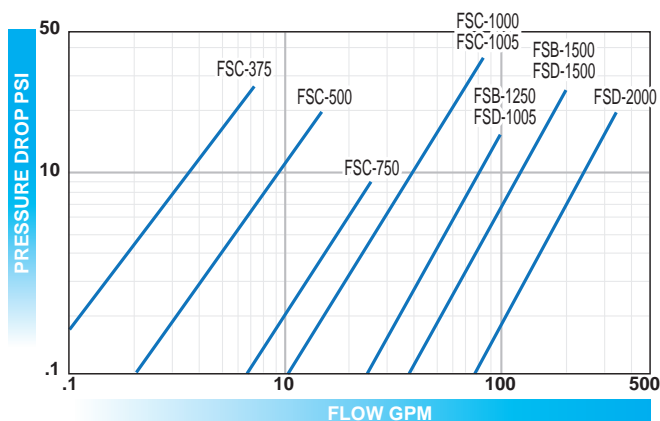

### Quad Flow Sensors

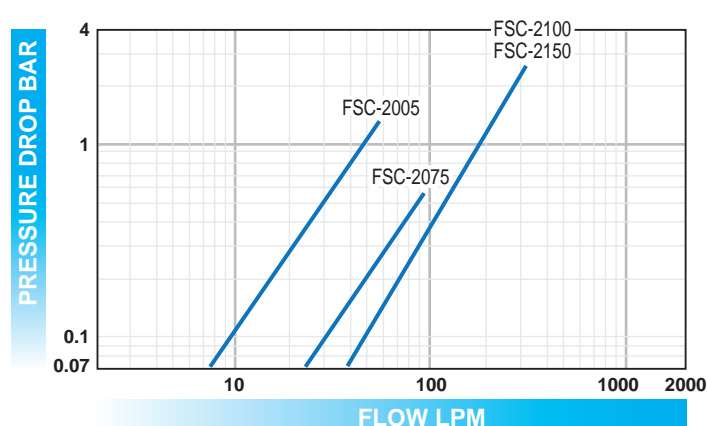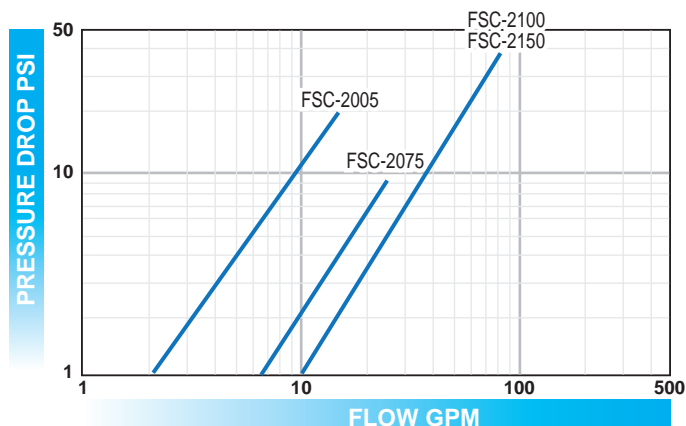



# K-Factor Scaler

## Frequency Divider

### SPECIFICATIONS

#### External Power:

Input Voltage	8.5 to 30 VDC, diode protected
Maximum	
Current Draw	18 mA, using internal resistor @ 30 VDC input

#### Inputs:

	Magnetic pick-up
Frequency Range	0-4000 Hz
Trigger Sensitivity	30 mV p-p to 30 V p-p

**Output Signal:** 30 VDC max voltage (open collector transistor) 0.25 W max power

Pulse type, using internal pull-up resistor;

$$V_H = \text{power input voltage} - 0.7 \text{ VDC}$$

$$V_L = \text{less than } 0.4 \text{ V @ max input power}$$

Pulse type, using external pull-up resistor;

$$V_H = \text{input voltage to external pull-up resistor}$$

$$V_L = [V_H / (\text{selected resistor value} + 47\Omega)] \times 47\Omega$$

Pulse length;

150µs, 1ms, 25ms, 100ms, 500ms, 1s or auto mode selectable

#### Internal Pull-up


**Resistor:** Jumper disable option 3.6K Ohm

#### Operating

**Temperature:** -22 to +158 °F (-30 to +70 °C)

**Enclosure:** UL 94-5VA flame retardant ABS with mounting flanges

### DIMENSIONS - Inches (mm)

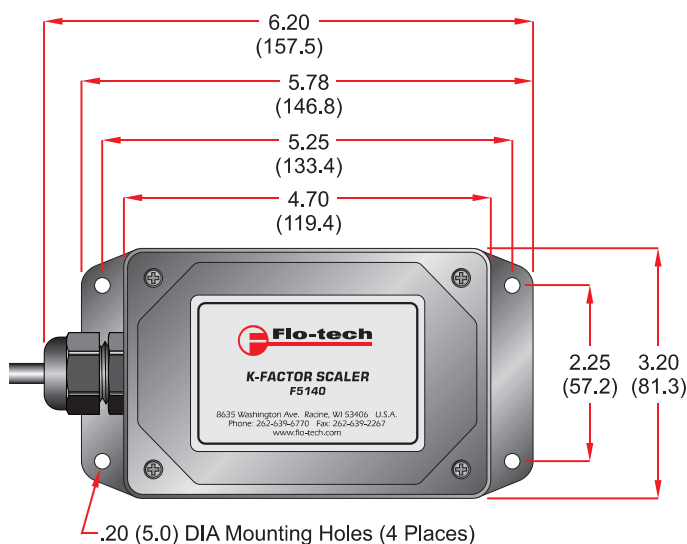

- Pre-amplifier for low level turbine meter
- Interface for pulse output devices to PLC, RTU, PC data acquisition card or similar devices
- Scale turbine meter output to desired engineering units
- On board microcontroller
- Internal or external pull-up resistor
- Compact ABS enclosure with mounting flanges
- Field adjustable (with optional software)
- K-factor range 1- 999,999,999

The K-Factor Scaler is a field adjustable frequency divider that converts the low level frequency output from a turbine meter into a scaled square wave output signal. This amplified, square wave output signal will interface with any frequency or counter input data collection device.

Due to the low level frequency signal of the FSC-375 and the Ultima F6202-F and F6222-F series turbine meters, the K-Factor Scaler is required to amplify the signal of these turbine meters for transmission to the Flo-tech F6600 and F6650 Series digital displays.

The K-Factor Scaler is also capable of converting the frequency output of a turbine meter into a different frequency, representing another unit of measure, such as liters, barrels, cubic feet, etc. This requires the optional programming software kit and the K-factor information unique to the turbine meter.

### ORDERING INFORMATION

MODEL	PART NUMBER
K-Factor Scaler	F5140
Programming Software Kit	F5141

# Pressure Sensor F6301 Series

With 4-20 mA Output

- 4-20 mA electrical output
- Long-term stability & repeatability
- Wide range of pressure ratings
- Stainless steel NEMA 4X enclosure

The F6301 Pressure Sensors utilize polysilicone strain resistors to create very low noise levels with very high signal output. The metal diaphragm and polysilicone bridge are unaffected by shock, vibration or mounting position.

## SPECIFICATIONS

### Overpressure:

Full scale in PSI	0-15 to 0-2000	0-3000 to 0-5000	0-6000 to 0-15,000
Proof	200%	150%	120%
Burst	800%	300%	150%

### Accuracy:

±1% of full scale
Non-linearity ±0.7%
Hysteresis ±0.2%
Non-repeatability ±0.07%

### Durability:

108 cycles 20/80% full scale with negligible performance change

### Response Time:

<5ms

### Environmental Effects:

Humidity	No performance effect at 95% relative humidity, non-condensing
Position Effect	<0.01% full scale

### Temperature:

Storage	-65 to +250 °F (-54 to +121 °C)
Operating	-20 to +180 °F (-29 to +82 °C)
Compensating	-20 to +160 °F (-29 to +71 °C)

### Thermal Coefficients (68 °F ref.) % full scale / °F Standard:

Zero	±0.04%
Span	±0.04%

### Vibration Sweep:

<±0.1% full scale effect for 0-2000 Hz at 20 g's in any axis

### Shock:

<±0.5% full scale effect for 100 g's, 20 ms shock in any axis




**Power Requirements:** 10-36 VDC unregulated  
4-20 mA reverse polarity protected

### Circuit to Case

**Insulation Resistance:** 100 M Ohms @ 50 VDC

### Electrical Output:

Signal 4-20 mA (2 wire)

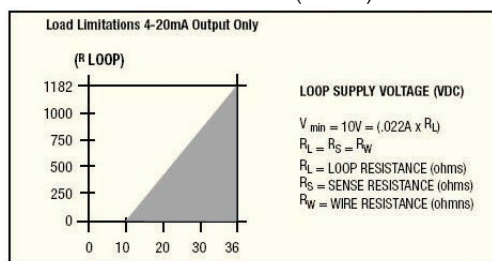

### Physical:

Enclosure NEMA 4X  
Weight 2 oz (approximate without cable)


### Materials:

Case 300 Series stainless steel  
Cable #24 AWG, 36" PVC, shielded, vented, UL approved  
Diaphragm 17-4 PH stainless steel  
Connection 1/4 NPT male

## ORDERING INFORMATION

PART NUMBER	PSI	Bar	kg/cm <sup>2</sup>
F6301-15	0 - 15	0 - 1.034	0 - 1.055
F6301-30	0 - 30	0 - 1.999	0 - 1.999
F6301-60	0 - 60	0 - 4.13	0 - 4.22
F6301-100	0 - 100	0 - 6.89	0 - 7.03
F6301-150	0 - 150	0 - 10.34	0 - 10.55
F6301-200	0 - 200	0 - 13.78	0 - 14.06
F6301-300	0 - 300	0 - 19.99	0 - 19.99
F6301-500	0 - 500	0 - 34.5	0 - 35.1
F6301-750	0 - 750	0 - 51.7	0 - 52.7
F6301-1K	0 - 1000	0 - 68.9	0 - 70.3
F6301-2K	0 - 2000	0 - 137.8	0 - 140.6
F6301-3K	0 - 3000	0 - 199.9	0 - 199.9
F6301-5K	0 - 5000	0 - 345	0 - 351
F6301-6K	0 - 6000	0 - 414	0 - 422
F6301-7.5K	0 - 7500	0 - 517	0 - 527
F6301-10K	0 - 10,000	0 - 689	0 - 703
F6301-15K	0 - 15,000	0 - 1034	0 - 1055

## DIMENSIONS - Inches (mm)

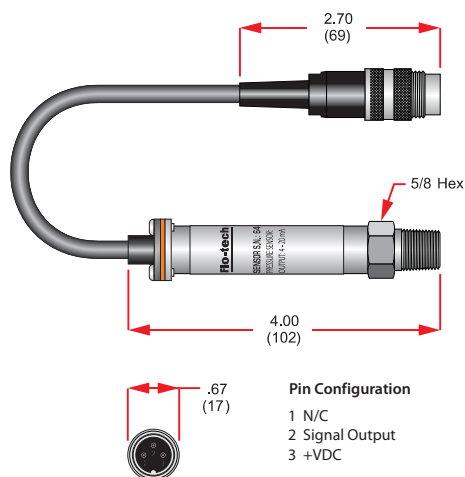

# Temperature Sensor F6310 Series


With 4-20 mA Output



- RTD temperature element
- 4-20 mA electrical output
- Temperatures up to +350 °F (+176 °C)
- Withstands pressures up to 6000 PSI (414 Bar)

These two-wire platinum RTD (resistance temperature detector) sensors with 4-20 mA output are designed for direct insertion into high pressure fluid systems without need for special pressure fittings. They are ideal for indicating system operating conditions, temperature testing and process measurements and control.

## DIMENSIONS - Inches (mm)

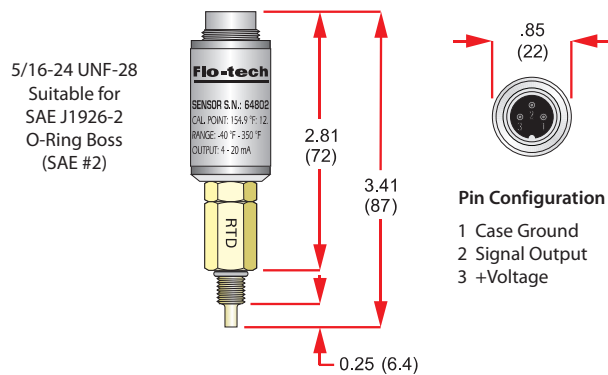

## SPECIFICATIONS

### Temperature Range:

Ambient	-40 to +185 °F (-40 to +85 °C)
Fluid	-40 to +350 °F (-40 to +177 °C)

### Accuracy:

See Sensor Accuracy vs  
Temperature Chart below

### Current Span Range:

4-20 mA

### Response Time:

3 seconds

### Maximum Pressure:

6000 PSI (414 Bar)

### Operating Loop Voltage:

Minimum	9V + Voltage of load resistor at 20 mA
Maximum	28V
Min Load Resistance	10 Ohms
Max Load Resistance (including wiring losses)	$\frac{\text{Loop Voltage} - 9V}{20 \text{ mA}} = \text{Ohms}$

## ORDERING INFORMATION

PART NUMBER	Fluid Temperature Range
F6310	-40 to +350 °F (-40 to +177 °C)

## Sensor Accuracy vs Temperature

Combined Celsius / Fahrenheit			Celsius Only		Fahrenheit Only	
Temperature		Accuracy	Temp.	Accuracy	Temp.	Accuracy
°C	°F	°C	°C	°C	°F	°F
-20	-4	±0.8	-20	±0.8	-4	±1.4
0	+32	±0.6	0	±0.6	0	±1.2
+100	+212	±1.2	+50	±0.9	+50	±1.2
+176	+350	±1.7	+100	±1.2	+100	±1.5
-	-	-	+150	±1.5	+200	±2.1
-	-	-	+176	±1.7	+300	±2.7
-	-	-	-	-	+350	±3.0

# Cables


Flo-tech offers a complete selection of mating cables to complete your hydraulic measurement system.

To select the appropriate cable for your application, refer to the Connecting Cable Charts shown below and on the next page.




Sensor Model		Connecting Cable	Connecting Ends	Signal Amplifier	Digital Display
FREQUENCY	FSC-375	F2832-6, 6 ft or F2832-15, 15 ft	MS female to tinned leads	F5140 K-Factor Scaler	F6600 / F6650 Series
	FSC-500	F2832-6, 6 ft or F2832-15, 15 ft	2-Pin (MS) female to tinned leads	—	F6600 / F6650 Series or HB2800 Series
	FSC-750				
	FSC-1000				
	FSC-1005				
	FSB-1250				
	FSB-1500				
	FSD-1250				
	FSD-1500				
	FSD-2000				
	F6202-F / F6222-F	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	F5140 K-Factor Scaler	F6600 / F6650 Series or HB2800 Series
	F6204-F / F6224-F	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	—	F6600 / F6650 Series
	F6206-F / F6226-F				
	F6208-F / F6228-F				
ANALOG	FSC-375 with IFC	F6557-6, 6 ft or F6557-15, 15 ft	5-Pin female to tinned leads	—	F6700 / F6750 Series
	FSC-500 with IFC				
	FSC-750 with IFC				
	FSC-1000 with IFC				
	FSC-1005 with IFC				
	FSB-1250 with IFC				
	FSB-1500 with IFC				
	FSD-1250 with IFC				
	FSD-1500 with IFC				
	FSD-2000 with IFC				
	F6202-AI / F6222-AI F6202-AV / F6222-AV	F6557-6, 6 ft or F6557-15, 15 ft	5-Pin female to tinned leads	—	F6700 / F6750 Series
	F6204-AI / F6224-AI F6204-AV / F6224-AV				
	F6206-AI / F6226-AI F6206-AV / F6226-AV				
	F6208-AI / F6228-AI F6208-AV / F6228-AV				
	F6301-X (Pressure Sensors)	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	—	F6700 / F6750 Series
	F6310 (Temperature Sensor)	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	—	F6700 / F6750 Series


## 2-Pin (MS) and 3 Pin Connectors for Frequency Flow Signals

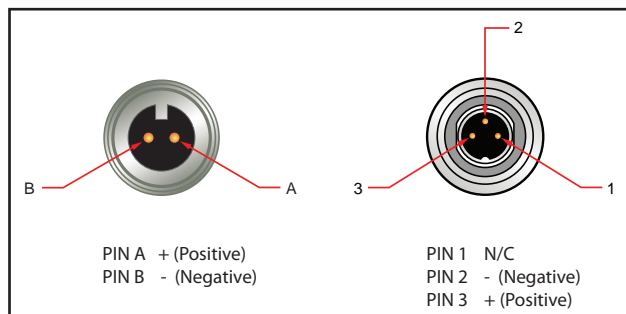

## 3-Pin Connectors for Analog Pressure and Temperature Signals

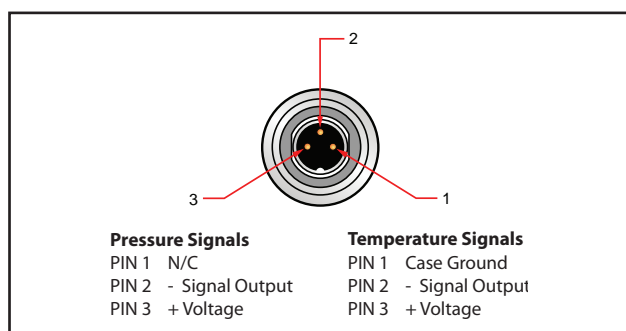

## 5-Pin Connector for Analog Flow Signals

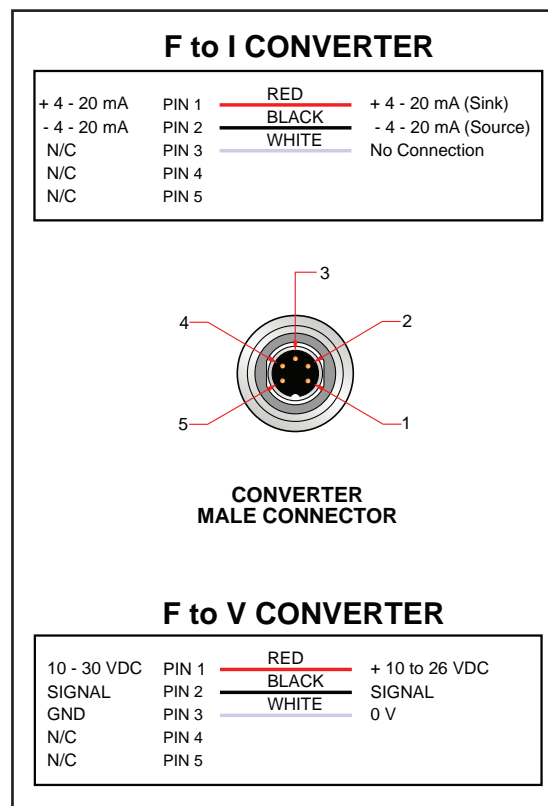

	Sensor Model	Connecting Cable	Connecting Ends	Signal Amplifier	Digital Display
FREQUENCY	F6150-F	F2832-6, 6 ft or F2832-15, 15 ft	2-Pin (MS) female to tinned leads	—	F6600 / F6650 Series or HB2800 Series
	F6153-F				
	F6156-F				
	F6159-F				
	F6161-F				
	F6163-F				
	F6165-F				
	F6167-F				
ANALOG	F6150-I and F6150-V	F6557-6, 6 ft or F6557-15, 15 ft	5-Pin female to tinned leads	—	F6700 / F6750 Series
	F6153-I and F6153-V				
	F6156-I and F6156-V				
	F6159-I and F6159-V				
	F6161-I and F6161-V				
	F6163-I and F6163-V				
	F6165-I and F6165-V				
	F6167-I and F6167-V				
	F6301-X (Pressure Sensors)	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	—	F6700 / F6750 Series
	F6310 (Temperature Sensor)	F6234-6, 6 ft or F6234-15, 15 ft	3-Pin female to tinned leads	—	F6700 / F6750 Series




# MC4000 Diagnostic Test Equipment

## Simultaneously Measures Flow, Pressure, Temperature, and Speed


- Hand-held hydraulic analyzer offers instant and recordable diagnostics
- Hydraulic horsepower calculation
- Measures fast transients
- Flow sensor linearization
- 2.5 MB data logging capacity
- Five sensor inputs, including:
  - Turbine Flow Sensor
  - Two Pressure Sensors
  - Temperature Sensor
  - RPM Speed indicator



### ORDERING INFORMATION

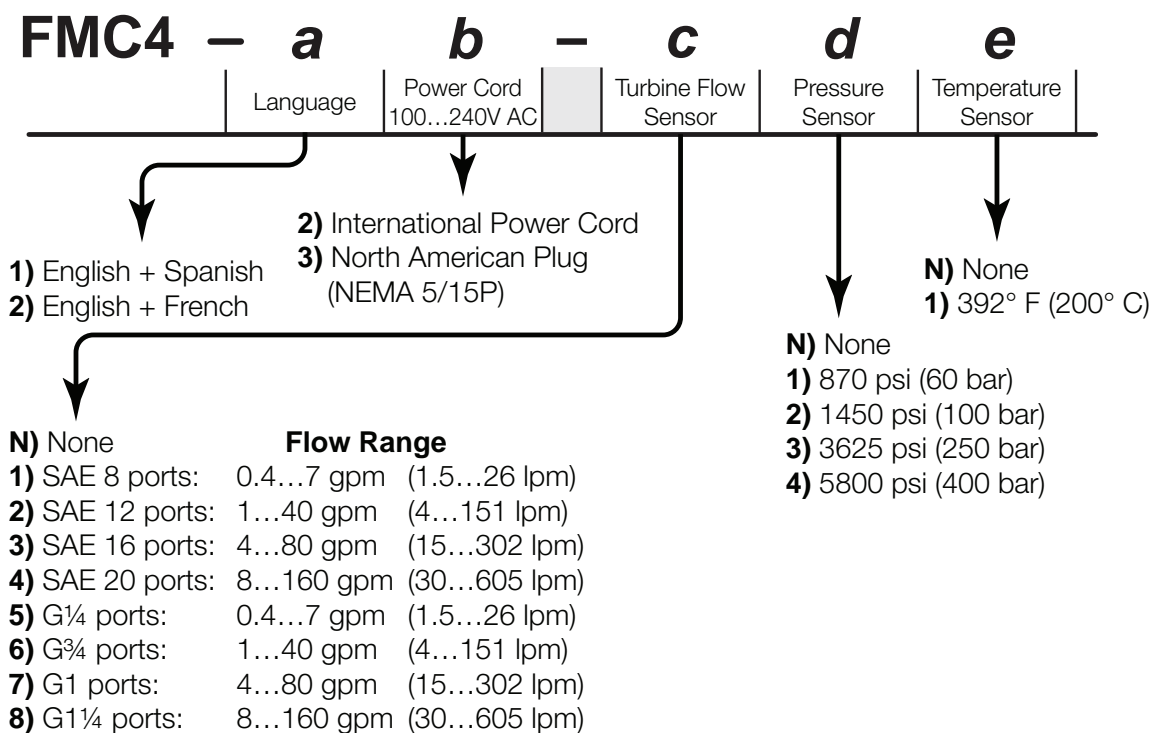

### DIMENSIONS - Inches (mm)

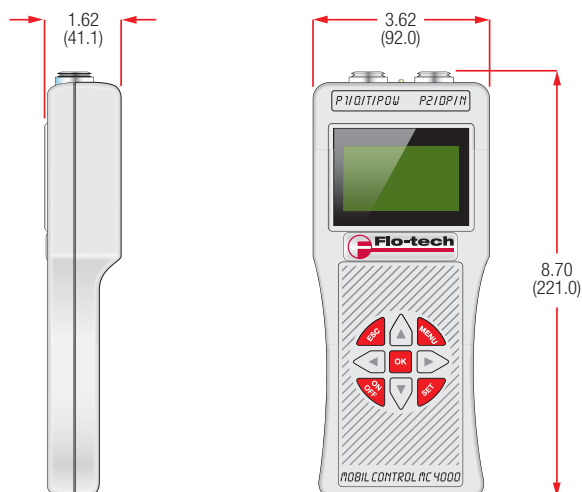

### ACCESSORIES

A comprehensive set of accessories is available for the MC4000. Use these accessories to expand the capabilities of the MC4000. For a complete list of available accessories see document TUR-PL-00031-EN.

# Hydraulic Formulas and Viscosity Information

## Flow Rate Formulas

$$\text{Frequency (Hz)} = \frac{K \times \text{GPM}}{60} \qquad \text{GPM} = \frac{\text{Hz} \times 60}{K}$$

$$K \text{ factor (K)} = \frac{\text{Hz} \times 60}{\text{GPM}} \qquad \text{Time Base (TB)} = \frac{\text{GPM}}{\text{Hz}}$$

## Flow Rate Related Formulas

$$\text{Valve } C_v \text{ Factor} = \frac{\text{Flow Rate (GPM)} \times \sqrt{\text{Fluid Specific Gravity}}}{\sqrt{\Delta P \text{ across valve (PSI)}}}$$

$$\text{Cylinder Velocity} = \frac{0.3208 \times \text{Flow Rate (GPM)}}{\text{Net Cylinder Area (in}^2\text{)}}$$

$$\text{Fluid Motor Torque} = \frac{\text{Flow Rate (GPM)} \times \text{Pressure (PSIG)} \times 36.77}{\text{Rotational Speed}}$$

## Power Calculations

$$\text{H.P.} = \frac{\text{GPM} \times \text{PSI}}{1714} \qquad \text{H.P.} = \frac{\text{LPM} \times \text{Bar}}{447.4} \qquad \text{kW} = \frac{\text{LPM} \times \text{Bar}}{600}$$

## Fluid Viscosity Conversion Table

		Saybolt Universal Seconds (SUS)	ISO-VG	CentiStoke	CentiPoise £	Typical Brands/Liquids at 100 °F
±1% Viscosity Range for Flo-tech Testers and Sensors is 25 to 500 SUS	Fluid viscosity used to calibrate Testers and Sensors.	31	2	1.0	0.876	Water
		35	3	2.5	2.19	-
		40	5	4.2	3.68	-
		45	5/7	5.9	5.17	-
		50	7	7.5	6.57	Kerosene
		55	7/10	8.8	7.71	Atlantic Richfield/Duro 55 Hydraulic Oil
		60	10	10.5	9.20	Monsanto/Skydrol - 500 A
		70	10/15	13.2	11.56	Mobil/Aero HFA Hydraulic Oil
		80	15	15.7	13.75	No. 4 Fuel Oil
		90	22	18.2	15.94	Stauffer Chemical/Fyrquel 90
		100	22	20.6	18.05	Conoco/Syncon Synthetic AW Hydraulic Oil
		150	32	32.0	28.03	Mobil/DTE 24 Hydraulic Oil
		200	46	43.2	37.84	Citco/Glycol FR-40XD (Oil in Water)
		300	68	65.0	56.94	SAE 20 Crankcase Oil
		400	68/100	86.0	75.34	Sunoco/Sunvis 41 Hydraulic Oil
		500	100	108	94.61	SAE 30 Crankcase Oil
		750	150	162	141.91	SAE 40 Crankcase Oil
		1000	220	216	189.22	Mobil/Paper Machine Oil - Type K
		1500	320	323	282.95	SAE 50 Crankcase Oil
		2000	460	431	377.56	Amoco/American Industrial Oil - No. 460
		3000	680	648	567.65	SAE 140 Gear Oil
		4000	1000	862	755.11	SAE 250 Gear Oil

£ CentiPoise are given for oil of 0.876 specific gravity. Relationship: CentiStokes × Specific Gravity = CentiPoise

Flo-tech is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities.  
Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2013 Badger Meter, Inc. All rights reserved.

**[www.badgermeter.com](http://www.badgermeter.com)**

---

**The Americas | Badger Meter** | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400  
**México | Badger Meter de las Americas, S.A. de C.V.** | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882  
**Europe, Middle East and Africa | Badger Meter Europa GmbH** | Nürtinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0  
**Czech Republic | Badger Meter Czech Republic s.r.o.** | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411  
**Slovakia | Badger Meter Slovakia s.r.o.** | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01  
**Asia Pacific | Badger Meter** | 80 Marine Parade Rd | 21-04 Parkway Parade | Singapore 449269 | +65-63464836  
**China | Badger Meter** | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412